
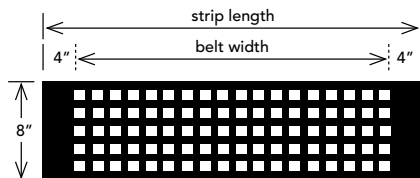


CERAFLEX PREMIUM CERAMIC LAGGING

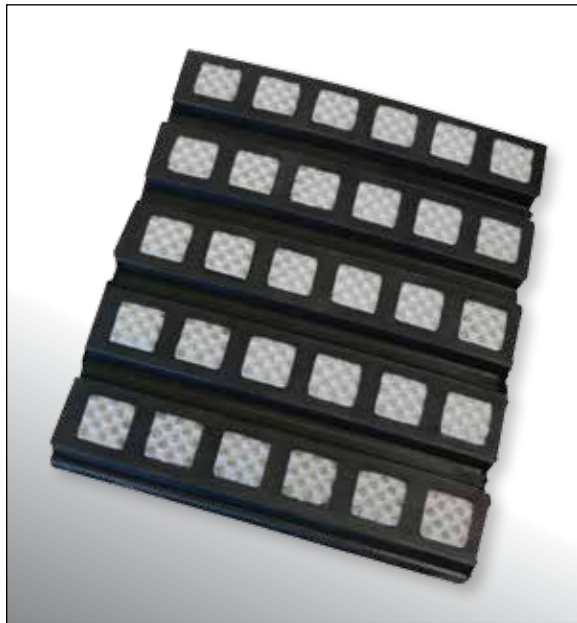

CeraFlex Premium Ceramic Lagging offers excellent performance on smaller pulleys with less stress. The in-line tile arrangement is perfect for lower tension T1 belts.

FEATURES

- Easy to use, in place installation eliminates the need to remove the pulley from the conveyor system; meaning less downtime
- Featuring a Fusion Systems proprietary bonding layer technology significantly enhancing the bond between the lagging and the pulley shell
- Tiles are bonded to the rubber on the bottom and all four sides, providing excellent performance in wet, dry or wet/muddy applications where slippage can occur
- 38% ceramic contact surface with the belt
- Compatible with a range of pulleys
- Compatible with Fusion adhesives
- Improved belt tracking
- Lower cost per ton
- Available in 12 and 15 mm thickness
- Width 8"
- 5 Year Tile Retention Warranty

CERAFLEX PREMIUM CERAMIC LAGGING - 12.5 mm

DIMPLED TILE	SMOOTH TILE *	FRAS DIMPLED *	FRAS SMOOTH	BELT WIDTH	CERAMIC LENGTH	OVERALL LENGTH
ORDER NUMBER	ORDER NUMBER	ORDER NUMBER	ORDER NUMBER	MM	MM	MM
CL-CFEE-18	CL-CFEE-18S	CL-CFEE-18-FR	CL-CFEE-18-FRS	450	475	750
CL-CFEE-24	CL-CFEE-24S	CL-CFEE-24-FR	CL-CFEE-24-FRS	600	625	900
CL-CFEE-30	CL-CFEE-30S	CL-CFEE-30-FR	CL-CFEE-30-FRS	750	750	1050
CL-CFEE-36	CL-CFEE-36S	CL-CFEE-36-FR	CL-CFEE-36-FRS	900	892	1200
CL-CFEE-42	CL-CFEE-42S	CL-CFEE-42-FR	CL-CFEE-42-FRS	1050	1075	1350
CL-CFEE-48	CL-CFEE-48S	CL-CFEE-48-FR	CL-CFEE-48-FRS	1200	1225	1500
CL-CFEE-54	CL-CFEE-54S	CL-CFEE-54-FR	CL-CFEE-54-FRS	1350	1375	1650
CL-CFEE-60	CL-CFEE-60S	CL-CFEE-60-FR	CL-CFEE-60-FRS	1500	1525	1800
CL-CFEE-66	CL-CFEE-66S	CL-CFEE-66-FR	CL-CFEE-66-FRS	1650	1675	1950
CL-CFEE-72	CL-CFEE-72S	CL-CFEE-72-FR	CL-CFEE-72-FRS	1800	1825	2100
CL-CFEE-78	CL-CFEE-78S	CL-CFEE-78-FR	CL-CFEE-78-FRS	1950	1975	2250
CL-CFEE-84	CL-CFEE-84S	CL-CFEE-84-FR	CL-CFEE-84-FRS	2100	2125	2400
CL-CFEE-90	CL-CFEE-90S	CL-CFEE-90-FR	CL-CFEE-90-FRS	2250	2025	2550
CL-CFEE-96	CL-CFEE-96S	CL-CFEE-96-FR	CL-CFEE-96-FRS	2400	2425	2700



Note: The above data is based on extensive testing and represents standard values. Shaw Almex Industries reserves the right to make changes without prior notice and refuses all claims arising from such changes. All items are subject to change without previous notice.