


T-BAR CLEANER

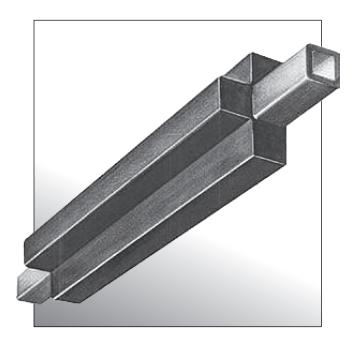

The T-Bar Belt Cleaner offers an excellent balance in cost and wear performance.

FEATURES

- Compounded out of a blend of SBR
- Long wear life at a lower price than other systems
- Fits into many competitive holders
- 3 wear surfaces reduces the number of change outs that are required
- Molded with a square walled metal tube that has a 3/16" wall thickness on belt widths to 32" and 1/4" on 40" belts and above

T-BAR UNIT PRODUCT CODE	BELT WIDTH		"E" LENGTH		"D" LENGTH		WEAR "A"		WIDTH "C"		HEIGHT "B"	
	ММ	IN	М	IN	М	IN	ММ	IN	ММ	IN	ММ	IN
CF-TB-20	500	20	770	30.75	490	19.25	30	1.25	95	3.75	62	2.5
CF-TB-26	650	26	925	36.5	635	25	30	1.25	95	3.75	62	2.5
CF-TB-32	800	32	1075	42.5	787	31	30	1.25	95	3.75	62	2.5
CF-TB-40	1000	40	1270	50	975	38.5	40	1.5	115	4.5	75	3
CF-TB-48	1200	48	1470	58	1180	46.5	40	1.5	115	4.5	75	3
CF-TB-56	1400	56	1670	66	1380	54.5	40	1.5	115	4.5	75	3
CF-TB-60	1500	60	1890	74.5	1600	63	40	1.5	115	4.5	75	3
CF-TB-72	1800	72	2090	82.5	1800	71	40	1.5	115	4.5	75	3

T-BAR BELT CLEANER

T-BAR BELT CLEANER PROPERTIES				
Elastomer	NR Blend			
Tensile Strength	20 Mpa 2755 PSI	DIN53504		
Elongation at Break	550%	DIN53504		
Density	1.1 g / cm ³	DIN53505		
Hardness	65 Shore A	DIN53505		



Note: The above data is based on extensive testing and represents standard values. Shaw Almex Industries reserves the right to make changes without prior notice and refuses all claims arising from such changes. All items are subject to change without previous notice.