




## SLITTER

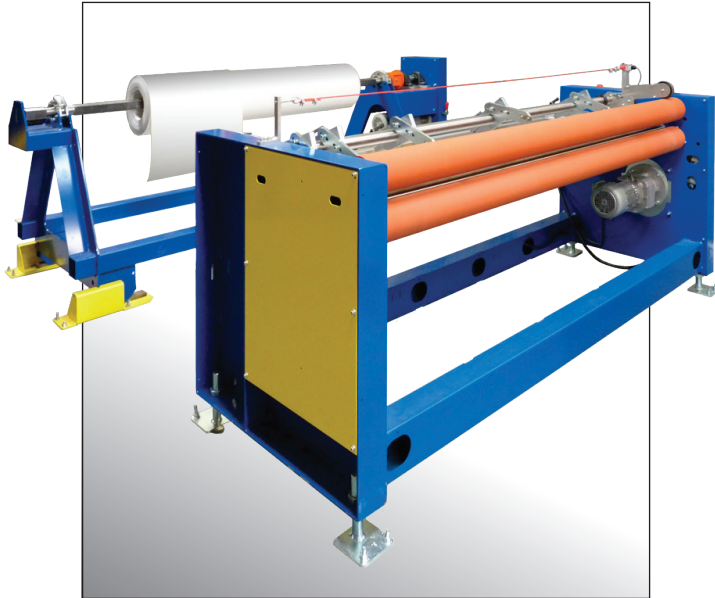

Model #AT-SL

The Almex Choice™ Slitter is designed for easy longitudinal cutting of conveyor belts up to 3 meters wide. While most belt slitting units require a vast amount of floor space, the Almex Choice™ slitter has a small footprint. No belt tension or floor track is required, ensuring a quick setup and increased productivity.

### FEATURES:

- Winder/Unwinder with:
  - Pneumatic roller tensioner to keep coils tight
  - 0-30 m/min cutting speed
  - Reversible variable speed drives
  - Manual tracking fence to control alignment
- Manual adjustable-feed belt fence
- Fix blade with knife mounted on moveable toolbar
- Powered side shift
- Easy-load chuck for coil drop-in
- Accommodates belts up to 2 meters or 3 meters
  - Wider available on custom order
- Custom power supply
- 1 HP or 2 HP options
- Digital length counter

### OPTIONAL COMPONENTS

- **AT-SL-UW** Winder/Unwinder

### SPECIFICATIONS

#### 2M SLITTER

WIDTH	LENGTH	VOLTAGE	WEIGHT	MAX WIDTH	SPEED	MAX LOAD	MAX THICKNESS	MIN LENGTH
2.7 M	1.2 M	220 3PH	200 KG	2.3 M	0-28 RPM	2750 KG	11.11 MM	N/A

#### 3M SLITTER

WIDTH	LENGTH	VOLTAGE	WEIGHT	MAX WIDTH	SPEED	MAX LOAD	MAX THICKNESS	MIN LENGTH
3.7 M	1.4 M	220 3PH	300 KG	3 M	0-28 RPM	3500 KG	11.11 MM	N/A



**Note:** The above data is based on extensive testing and represents standard values. Shaw Almex Industries reserves the right to make changes without prior notice and refuses all claims arising from such changes. All items are subject to change without previous notice.