


## FUSIONLAGG WMD

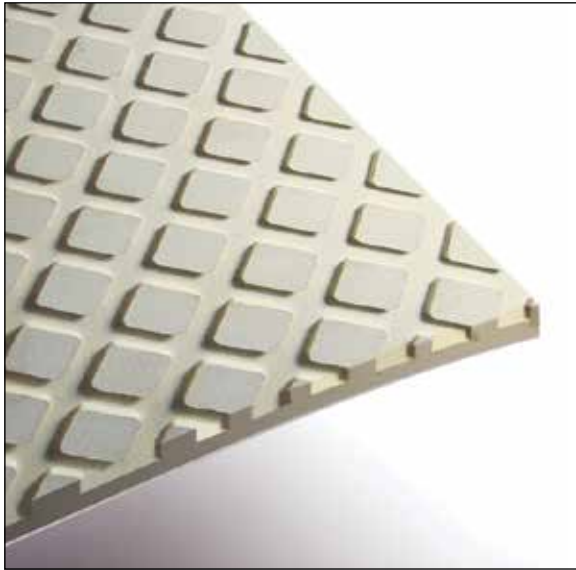

FusionLagg WMD (White Mini Diamond) is a small profile pulley lagging, ideal for driven pulleys with medium to low tensions and belt ratings.

### FEATURES

- Press cured, FusionLagg WMD is compounded specifically for use in food, tobacco or pharmaceutical applications
- Nitrile rubber content, moulded in a mini diamond pattern for exceptional grip and wear resistance
- Provided with the Fusion bonding layer on the reverse side for superior adhesion to pulley surface
- Drive pulleys require a small profile and are particularly suited for food handling applications, either wet or dry

## FUSIONLAGG WMD

PRODUCT CODE	THICKNESS/GAUGE			WIDTH		LENGTH		ROLL WEIGHT	
	FRAC	MM	IN	M	IN	M	FT	KG	LB
CFL-WMD-3166	5/16	8	.31	1300	51	5	16.5	124	56

FUSIONLAGG WMD PROPERTIES			
Colour	White		
Elastomer	Nitrile		
Tensile Strength	10.5 Mpa		DIN 53504
Elongation at Break	620%		DIN 53504
Density	1.20 g / cm <sup>3</sup>		DIN 35050
Hardness	53 Shore A		DIN 53505
Abrasion Resistance	300 mm <sup>3</sup>		DIN 53516
Groove Dimensions	4 mm x 3 mm		3/16" x 1/8"
Diamond Dimensions	40 mm x 20 mm		1" x 3/4"