




SPLICING FOIL

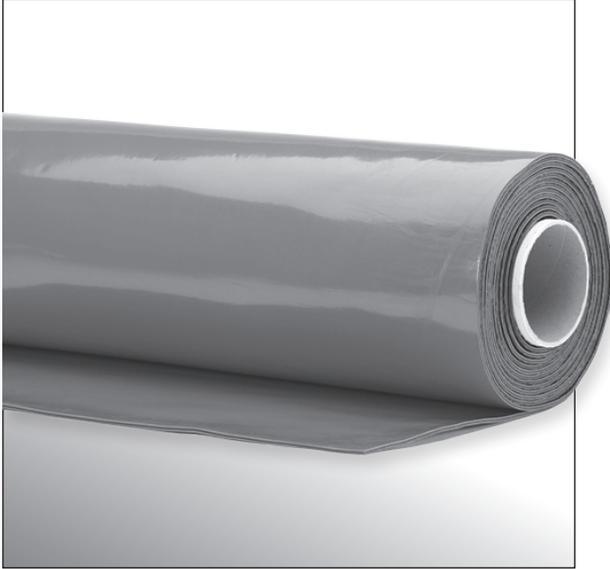

Fusion Splicing Foil is excellent for replacing damaged or worn layers in a conveyor belt when building up a repair. Use in conjunction with Fusion Cover Rubber compound.

FEATURES

- Higher abrasion index than most belt covers
- Recommended for use in cold splicing of conveyor belts
- Bonding layer compound
- Recommended for repair of conveyor belts or tank linings (under certain conditions)
- Use in conjunction with Fusion Cover Rubber compound, ECRF and CRF adhesives

SPLICING FOIL

PRODUCT CODE	THICKNESS/GAUGE		WIDTH		LENGTH		WIDTH	
	MM	IN	MM	IN	M	FT	KG	LBS
CF-SF-032316	.08	.03	500	20	5	16.5	4	8
CF-SF-032333	.08	.03	500	20	10	33	8	17



Note: The above data is based on extensive testing and represents standard values. Shaw Almex Industries reserves the right to make changes without prior notice and refuses all claims arising from such changes. All items are subject to change without previous notice.