


# SOLO XPRESS

The Almex SOLO Xpress press is the lightest rubber vulcanizer in the industry. This dependable, portable frame press is designed for a single user and uses little power. With an ergonomic and efficient design, the two-piece SOLO Xpress requires little time for assembly and disassembly. It can be carried to the splice location with ease.

## ■ FEATURES:

- Signature Almex Pressure Bag construction for uniform pressure
- Custom Extruded Plank cooling system within platens
- Innovative Silicone Element fast heating system
- Upper and lower rugged aluminum frames
- T-Series control panel in frame or external for managing temperature
- Side and end handles make transportation easy
- All electric control panels used with SOLO Xpress are CE, CSA and UL approved
- SOLO Xpress platens are a rhombic configuration
- SOLO Xpress presses can be aligned side-by-side for longer splices
- Each SOLO Xpress is custom built-to-order

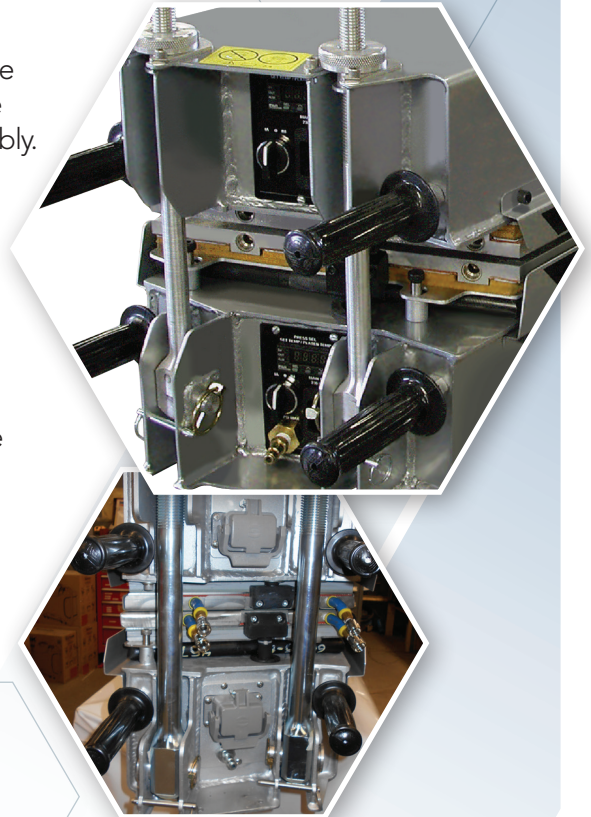

NA

Shaw Almex  
Europe B.V.  
☎ 31 646648648

Shaw Almex  
Industries, Canada  
☎ 1 905 643 7750

Shaw Almex  
Industries, Canada  
☎ 1 705 746 5884

Shaw Almex  
Fusion, LLC. U.S.A.  
☎ 1 404 292 8600

Shaw Almex  
Africa (Pty) Ltd.  
☎ 27 11 794 8262

 **ALMEX**  
GROUP  
www.almex.com 1.800.977.5423



COMPONENT	DESCRIPTION
<b>PLATENS</b>	<ul style="list-style-type: none"> <li>Utilizes innovative Almex flexible platen constructed from extruded plank, silicone heating element and durable composite insulation</li> <li>Each platen contours to belt irregularities, ensuring uniform results. Maximum temperature 163 °C (325 °F)</li> <li>Rhombic platens</li> </ul>
<b>FRAME</b>	<ul style="list-style-type: none"> <li>Two light and rugged aluminum frames comprise upper and lower portions of press</li> <li>Ends equipped with carrying handles on smaller models; sides are also equipped with handles on larger models.</li> </ul>
<b>CONTROL PANEL</b>	<b>Suitable Controls:</b> <ul style="list-style-type: none"> <li>T1F: Inframe, maximum 30 amps total</li> <li>T2: Remote, maximum 40 amps total for 230 Volt single phase operation</li> <li>T6: Remote, maximum 30 amps total for three phase operation</li> <li>T2 and T6 panels feature dual temperature control and indication systems</li> <li>Optional timer available on T2 and T6 models.</li> </ul>
<b>PRESSURE/COOLING</b>	<ul style="list-style-type: none"> <li>Almex inflatable pressure system, made from durable fabric-reinforced rubber ensures uniform pressure across splice surface</li> <li>Presses available for 100 PSI maximum</li> <li>Quick integral water cooling incorporated in platen design</li> </ul>

NA

Shaw Almex  
Europe B.V.  
☎ 31 646648648

Shaw Almex  
Industries, Canada  
☎ 1 905 643 7750

Shaw Almex  
Industries, Canada  
☎ 1 705 746 5884

Shaw Almex  
Fusion, LLC. U.S.A.  
☎ 1 404 292 8600

Shaw Almex  
Africa (Pty) Ltd.  
☎ 27 11 794 8262


**ALMEX**  
GROUP  
www.almex.com 1.800.977.5423