

“THIS THING IS AWESOME...”

— Hunter Willis, Owner  
All Southern Industrial & Supply, LLC.

# VORTEX AIR

## PORTABLE VULCANIZING PRESS


The Vortex Press was designed to splice right on site. It's an air-cooled, portable press specifically made for PVC/PU conveyor belts. No extra control box, hoses or cooling tanks are required, everything is built right in. Splicing has never been easier and more efficient. With our quick joint cycles, you won't have to wait long for the great results.

### FEATURES:

- 6 models to choose from ranging in length from 510-1610 cm / 20 - 63", accommodating belt widths 400 mm / 16" to 1500 mm / 60"
- All-In-One: Press + Control Unit + Air compressor + Air Cooling
- Completely Automatic Operation and remote operation available
- Lightweight aluminum construction
- Low profile height: 200 mm / 8" high
- Temperature up to 200 °C (392 °F)
- Operating Pressure 2.1 KG/CM2 / 30 PSI
- Available in 110- or 220-volt single phase
- VX-1310 and VX-1610 also available in 460 Volt 3-phase

### OPTIONS:

- Remote/WIFI Control unit with Android application

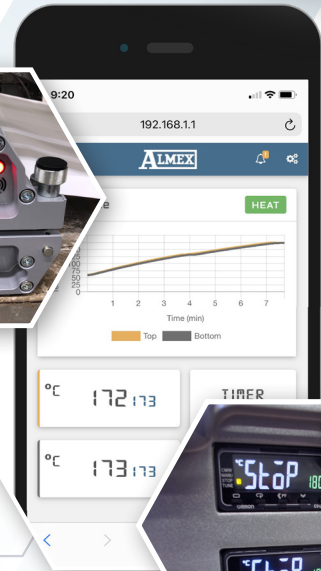

	PLATEN SIZE		MAX BELT WIDTH		O/A WIDTH		O/A HEIGHT		TOTAL WEIGHT	
	MM	IN	MM	IN	MM	IN	MM	IN	KG	LB
VX 510	160 mm x 510 mm	6" x 20"	455 mm	18"	585 mm	23"	230 mm	8"	27 kg	59 lb
VX 710	160 mm x 710 mm	6" x 28"	660 mm	26"	785 mm	31"	230 mm	9"	35 kg	76 lb
VX 910	160 mm x 910 mm	6" x 36"	865 mm	34"	990 mm	39"	230 mm	9"	42 kg	92 lb
VX 1110	160 mm x 1110 mm	6" x 42"	1065 mm	42"	1195 mm	47"	230 mm	9"	49 kg	109 lb
VX 1310	160 mm x 1310 mm	6" x 49"	1245 mm	55"	1395 mm	55"	230 mm	9"	57 kg	126 lb
VX 1610	160 mm x 1610 mm	6" x 63"	1525 mm	60"	1675 mm	65"	230 mm	9"	68 kg	150 lb

NA

<p><b>MODEL – VORTEX</b></p> <p><b>6 inch (160 mm) Platen</b></p>		<p>Maximum operating pressure 30 psi (2.2 kg/cm<sup>2</sup>)</p> <p>Maximum temperature 392 deg F (200 deg C)</p>
---	--	---

MODEL	PLATEN SIZE		MAXIMUM BELT WIDTH		OVERALL LENGTH		DIMENSION A		DIMENSION B		DIMENSION C		DIMENSION D		TOTAL WEIGHT	
	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM
VX-510	6 x 20	160 x 510	18	455	23	585	3.3	84	4.6	118	8	205	9	230	59	27
VX-710	6 x 28	160 x 710	26	660	31	785	3.3	84	4.6	118	8	205	9	230	76	35
VX-910	6 x 36	160 x 910	34	865	39	990	3.3	84	4.6	118	8	205	9	230	92	42
VX-1110	6 x 44	160 x 1110	42	1065	47	1195	3.3	84	4.6	118	8	205	9	230	109	49
VX-1310	6 x 51	160 x 1310	49	1245	55	1395	3.3	84	4.6	118	8	205	9	230	126	57
VX-1610	6 x 63	160 x 1610	60	1525	66	1675	3.3	84	4.6	118	8	205	9	230	150	68

*Specifications are approximate and subject to change without notice.*