


# PRO CHROME SERIES

The PRO Chrome Series is a polished aluminum frame style vulcanizing press that allows for quick and easy operations. With retractable end handles, side handles (on larger units), and positioning rings (for larger models), the PRO Chrome Series presses are easy to maneuver into the desired splice position.

Ask about a custom vinyl wrap for your PRO; choose your design from the catalog, provide your logo and get a custom-branded wrap for your press!

## ■ FEATURES:

- Operating pressure of 4kg/cm<sup>2</sup> (60 psi) or 7kg/cm<sup>2</sup> (100 psi)
- Signature Almex "Pressure Bag" uniform pressure system
- Custom "Extruded Plank" cooling system within platens
- Platens built to order in either a rhombic or rectangular design
- Durable "Silicone Element" heating system, custom designed to voltage phase and cycle
- Can be aligned side-by-side for a longer splice area and easier handling
- PRO Chrome Series 60 can vary in width from 330 mm (13") up to 485 mm (19")
  - Length span from 710 mm (38") to 1475 mm (58")
  - Weights range from 100 kg (220 Lbs.) to 214 kg (472 Lbs.)
- PRO Chrome Series 100 platens range from 355 mm (14") up to 810 mm (32")
  - Lengths span from 510 mm (20") to 22850 mm (90")
  - Weights range from 64 kg (142 lbs.) to 685 kg (1,510 Lbs.)

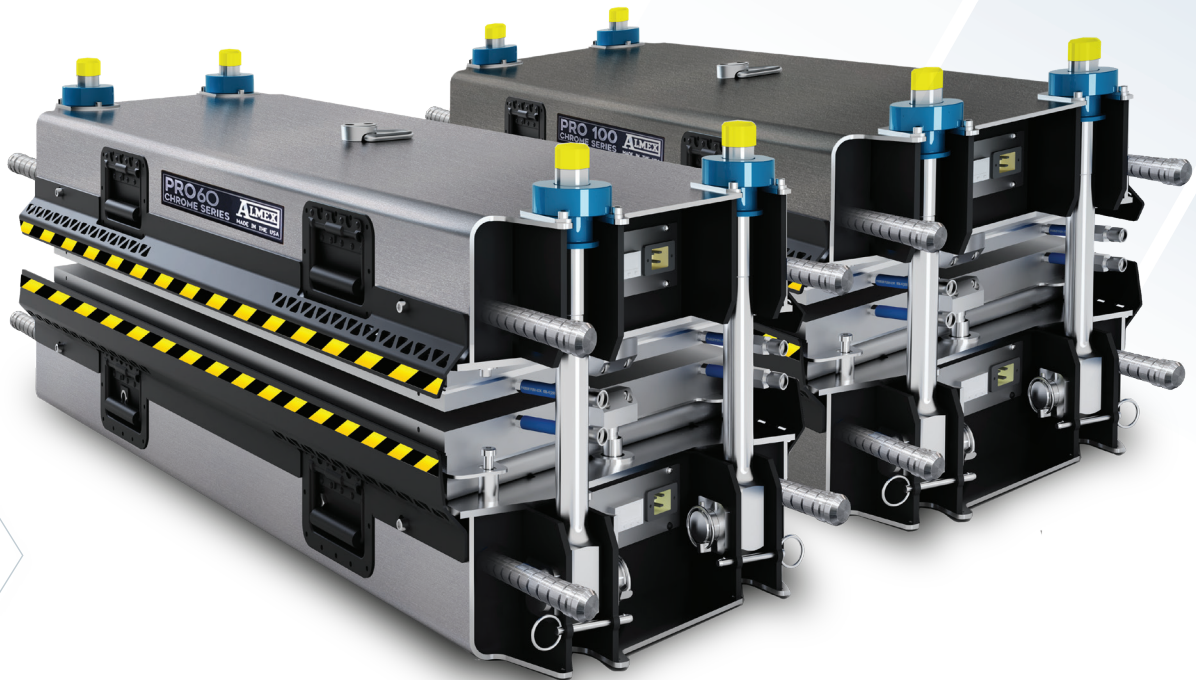

NA

Shaw Almex  
Europe B.V.  
☎ 31 646648648

Shaw Almex  
Industries, Canada  
☎ 1 905 643 7750

Shaw Almex  
Industries, Canada  
☎ 1 705 746 5884

Shaw Almex  
Fusion, LLC U.S.A.  
☎ 1 404 292 8600

Shaw Almex  
Africa (Pty) Ltd.  
☎ 27 11 794 8262


**ALMEX**  
GROUP  
[www.almex.com](http://www.almex.com) 1.800.977.5423



COMPONENT	DESCRIPTION
<b>PLATENS</b>	<ul style="list-style-type: none"> <li>Utilizes innovative Almex flexible platen constructed from extruded plank, silicone heating element and durable composite insulation</li> <li>Each platen contours to belt irregularities, ensuring uniform results. Maximum temperature 163 °C (325 °F)</li> <li>Platens available in rhombic or rectangular design</li> </ul>
<b>FRAME</b>	<ul style="list-style-type: none"> <li>Two light and rugged aluminum frames comprise upper and lower portions of press</li> <li>Ends are equipped with retractable handles</li> <li>Larger models are also equipped with handles on the sides</li> </ul>
<b>CONTROL PANEL</b>	<p><b>Suitable Controls:</b></p> <ul style="list-style-type: none"> <li>T1F: Inframe, maximum 30 amps total</li> <li>T2: Remote, maximum 40 amps total) for 230 Volt single phase operation</li> <li>T6: Remote, maximum 30 amps total) for three phase operation</li> <li>T2 and T6 panels feature dual temperature control and indication systems</li> <li>Optional timer available on T2 and T6</li> <li>Ground Fault available on request.</li> </ul>
<b>PRESSURE/COOLING</b>	<ul style="list-style-type: none"> <li>Almex inflatable pressure system, made from durable fabric-reinforced rubber ensures uniform pressure across the splice surface</li> <li>Quick integral water cooling incorporated in platen design</li> </ul>

NA

Shaw Almex  
Europe B.V.  
☎ 31 646648648

Shaw Almex  
Industries, Canada  
☎ 1 905 643 7750

Shaw Almex  
Industries, Canada  
☎ 1 705 746 5884

Shaw Almex  
Fusion, LLC U.S.A.  
☎ 1 404 292 8600

Shaw Almex  
Africa (Pty) Ltd.  
☎ 27 11 794 8262


**ALMEX**  
GROUP  
www.almex.com 1.800.977.5423