


CABLE STRIPPER



The Almex **Cable Stripper** will uniformly strip conveyor belt steel cables either on-site or in a belt shop. It strips quickly without turning the belt and is easy to handle with two people, saving you time over the manual stripping. Steel cables stay surrounded in a thin rubber layer so that the core rubber adheres in the splice.

The upper blade holds down the first steel cord and the bottom blade skims the second cable, creating the tension and traction needed to strip the cable top and bottom. Move the cable stripper to the right one steel cable at a time, all cables are stripped.

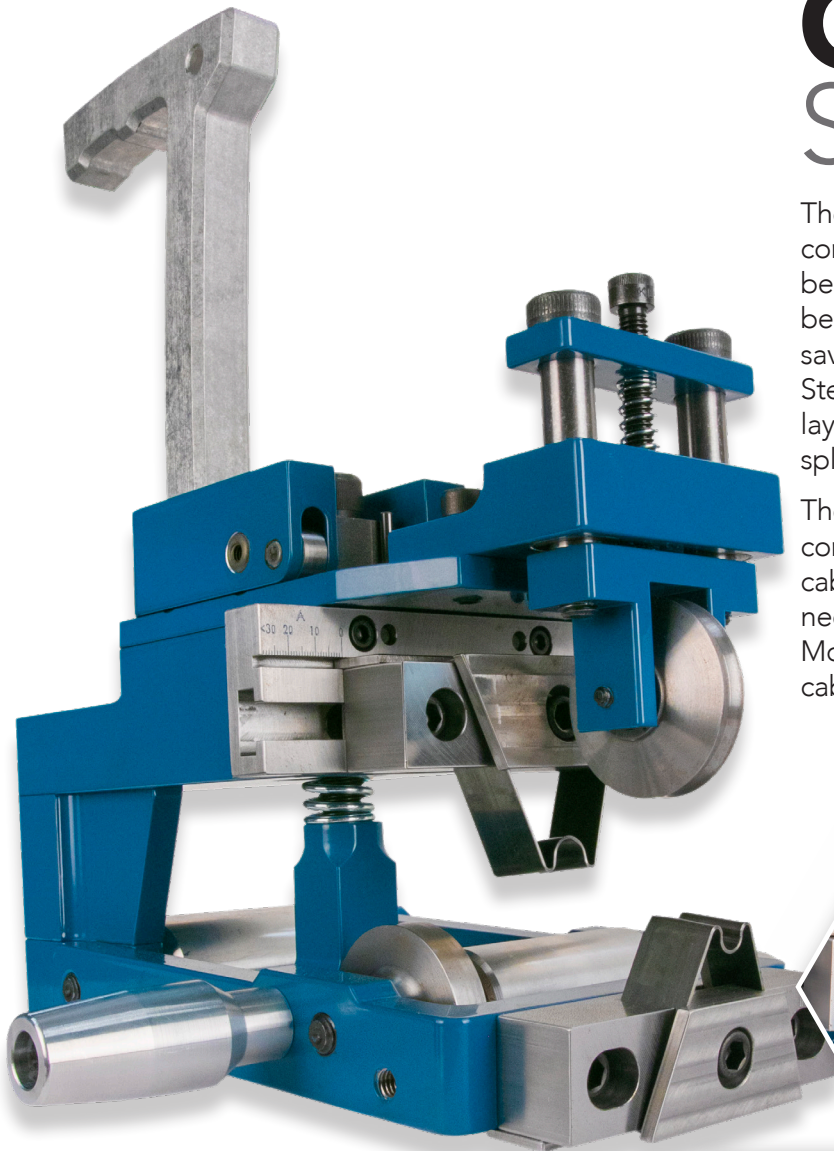

FEATURES:

- Cutting unit for cable pitches up to 25 mm (1") and cable diameters up to 15.7 mm (0.618")
- Pair with a winch for the necessary force to strip a steel cable
- Rubber cover thickness up to 12 mm (0.47") return side and 25 mm (1") carrying side
- Units are guarded and protected for operator safety
- Stainless & Aluminum construction
- Measuring guides on the left side

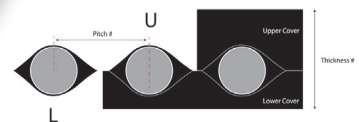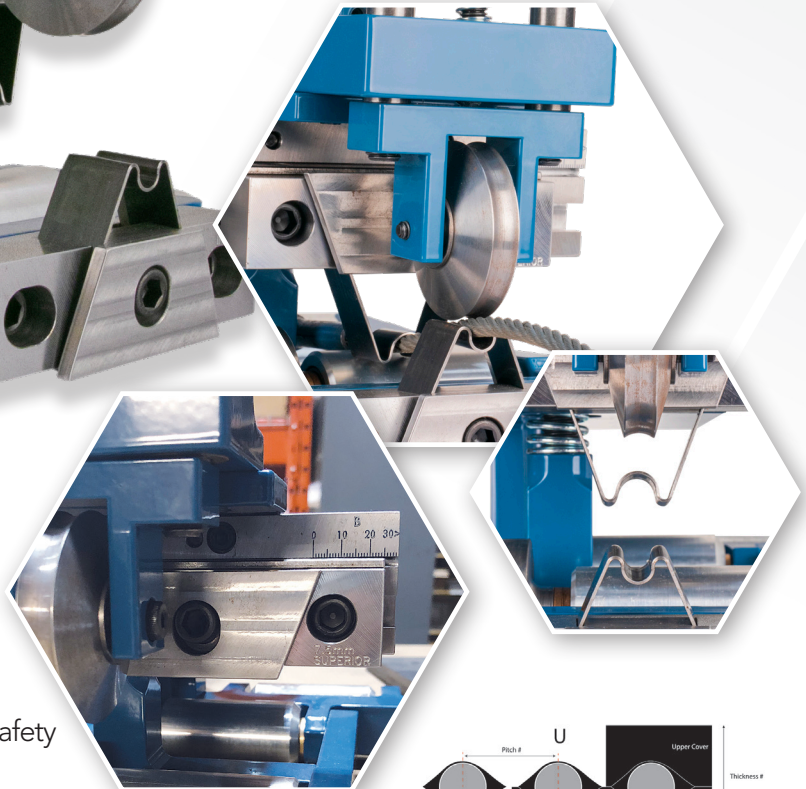

GL

Shaw Almex
Mining Equip. (Tianjin) Co. Ltd.
☎ +86 (22) 2388-9075

PT. Shaw Almex
Indonesia
☎ +61 488 780243

Shaw Almex
Pacific Pty Ltd. Qld
☎ 61 7 4774 2011

Shaw Almex
Pacific Pty Ltd. WA
☎ 61 8 9358 5860

Shaw Almex
India PVT. Ltd.
☎ 91-129-2274624

ALMEX
GROUP
www.almex.com 1.800.977.5423

SPECIFICATIONS:


- 14.5" x 11.25" x 15.75"
(36.8cm x 28.6cm x 40cm)
- 15 kg (33 Lbs.)

PRODUCT CODE	DESCRIPTION	BLADES SUPPORTED	CABLE DIAMETER RANGE
BAT-CSM-001	Cable Stripper Cutting Unit	Steel cable Belt Stripping Unit	
BAT-UB-A	Upper Blade Holder – A	R2.8 ~ R3.8 (0.110" ~ 0.287")	For cable Ø 5.3 ~ 7.3 mm (0.209" ~ 0.287")
BAT-LB-A	Lower Blade Holder – A	R2.8 ~ R3.8 (0.110" ~ 0.287")	For cable Ø 5.3 ~ 7.3 mm (0.209" ~ 0.287")
BAT-UB-B	Upper Blade Holder – B	R4 ~ R6 (0.157" ~ 0.236")	For cable Ø 7.7 ~ 11.7 mm (0.276" ~ 0.461")
BAT-LB-B	Lower Blade Holder – B	R4 ~ R6 (0.157" ~ 0.236")	For cable Ø 7.7 ~ 11.7 mm (0.276" ~ 0.461")
BAT-UB-C	Upper Blade Holder – C	R6.5 ~ R8 (0.256" ~ 0.315")	For cable Ø 12.7 ~ 15.7 mm (0.5 ~ 0.618")
BAT-LB-C	Lower Blade Holder – C	R6.5-R8 (0.256" ~ 0.315")	For cable Ø 12.7 ~ 15.7 mm (0.5 ~ 0.618")

CABLE STRIPPER REPLACEMENT BLADES

PRODUCT CODE	UPPER & LOWER BLADES	MIN. CABLE DIAMETER (MERIC/IMPERIAL)
PT-CSB-R3.8	R3.8	Ø 7.3 mm (0.256")
PT-CSB-R4	R4	Ø 7.7 mm (0.295")
PT-CSB-R4.5	R4.5	Ø 8.7 mm (0.335")
PT-CSB-R5	R5	Ø 9.7 (0.382")
PT-CSB-R5.5	R5.5	Ø 10.7 (0.421")
PT-CSB-R6	R6	Ø 11.7 (0.460")
PT-CSB-R6.5	R6.5	Ø 12.7 (0.5")
PT-CSB-R7	R7	Ø 13.7 (0.539")
PT-CSB-R7.5	R7.5	Ø 14.7 (0.579")

Providing your belt specs will ensure we supply you with the correct blades and holder on order. Additional blade sizes may be available by special order.

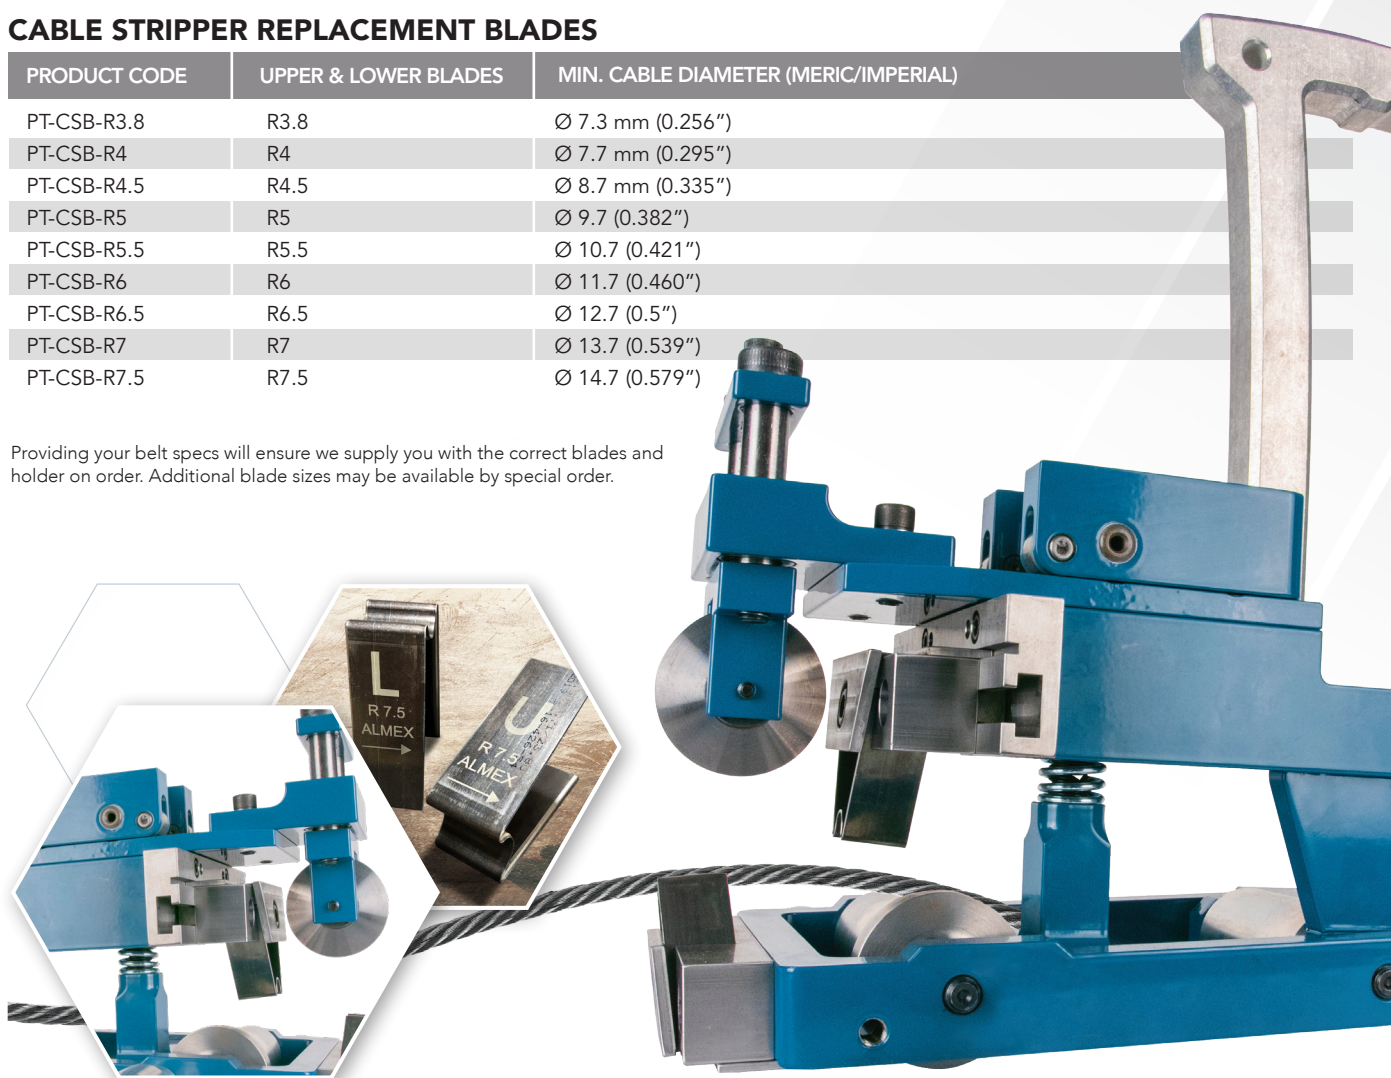

GL

Shaw Almex
Mining Equip. (Tianjin) Co. Ltd.
☎ +86 (22) 2388-9075

PT. Shaw Almex
Indonesia
☎ +61 488 780243

Shaw Almex
Pacific Pty Ltd. Qld
☎ 61 7 4774 2011

Shaw Almex
Pacific Pty Ltd. WA
☎ 61 8 9358 5860

Shaw Almex
India PVT. Ltd.
☎ 91-129-2274624

 **ALMEX**
GROUP
www.almex.com 1.800.977.5423