NEW TECHNOLOGY

GLIDER

ALMEX BELT TRACKERS

The **GBT Glider** utilizes breakthrough technology for superior traction and grip of your belt to help prevent damage and ripping from belt over-runs. Aquaplaning and slippage is virtually eliminated due to the water-shedding dispersal effect of the castellated rubber rings.

The main focus around the development of the Glider Tracker Rollers was on the "traction and grip" between the conveyor belt and the tracker roller. The friction between the conveyor belt and the tracker roller creates a "polishing and grinding" effect that ultimately leads to a smooth and slippery rubber surface on any tracker roller. This is also noted and prevalent on all rubber covered pulleys.

FEATURES:

- Grinded and Balanced with a zero run-out
- 25mm rubber outer shell provides extended life
- Performs well in wet and dry conditions
- Replaceable bearings and seals
- 600-1500MM Flat return

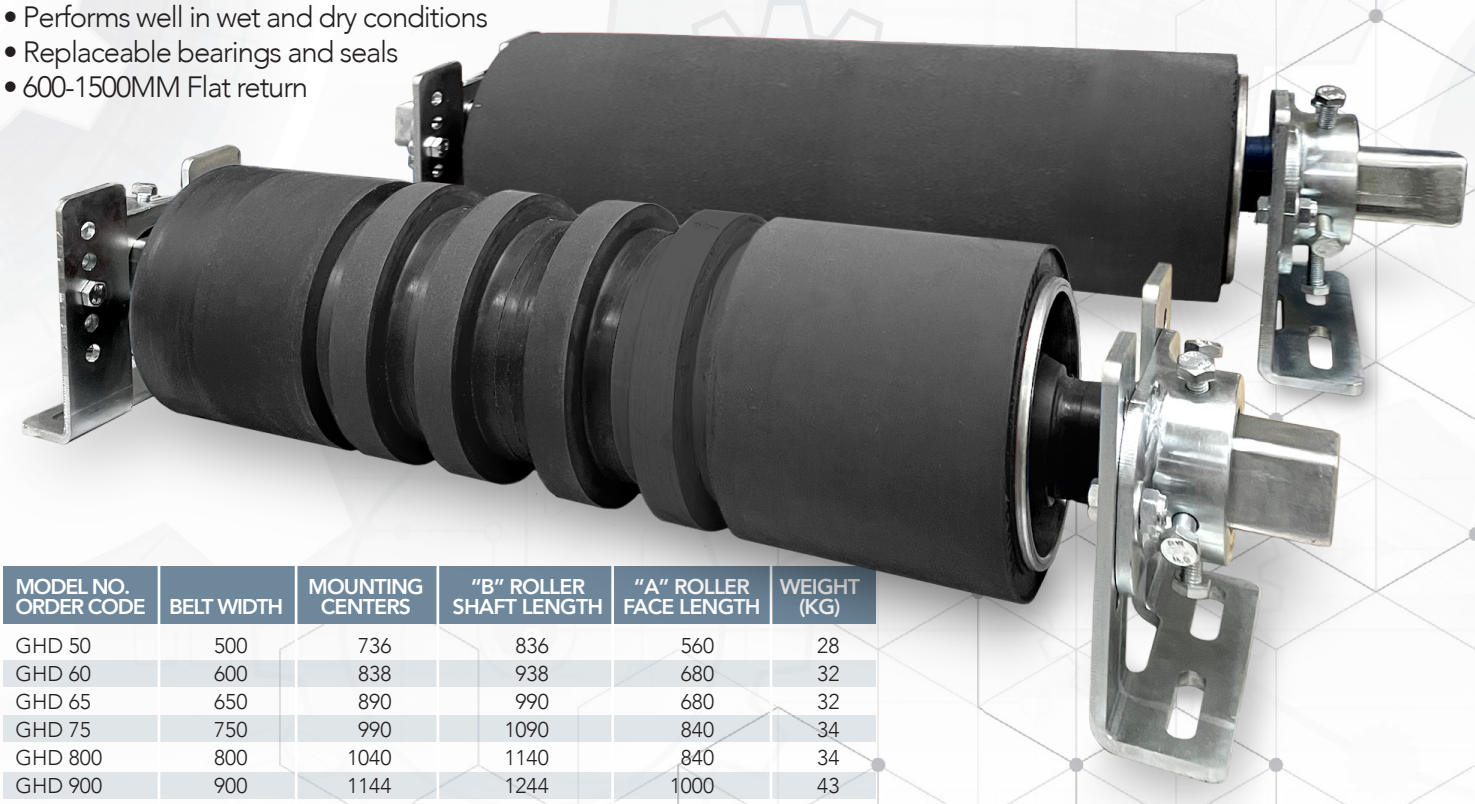

MODEL NO. ORDER CODE	BELT WIDTH	MOUNTING CENTERS	"B" ROLLER SHAFT LENGTH	"A" ROLLER FACE LENGTH	WEIGHT (KG)
GHD 50	500	736	836	560	28
GHD 60	600	838	938	680	32
GHD 65	650	890	990	680	32
GHD 75	750	990	1090	840	34
GHD 800	800	1040	1140	840	34
GHD 900	900	1144	1244	1000	43
GHD 1000	1000	1194	1294	1160	45
GHD 1050	1050	1296	1396	1160	45
GHD 1200	1200	1448	1548	1320	69
GHD 1350	1350	1600	1700	1480	73
GHD 1400	1400	1700	1800	1480	73
GHD 1500	1500	1752	1852	1640	81

NA

Shaw Almex Europe B.V. 31 646648648
Shaw Almex Industries, Canada 1 905 643 7750
Shaw Almex Industries, Canada 1 705 746 5884
Shaw Almex Fusion, LLC. U.S.A. 1 404 292 8600
Shaw Almex Africa (Pty) Ltd. 27 11 794 8262

Updated: January 2023