


ALMEX BAR CLAMP

Created for maximum grip, the **Almex Bar Clamp** offers exceptional belt clamping strength for forces and loads accompanying conveyor belt installations, splicing and repair. Made from high grade aluminum components, the clamp style is light, safe, and durable; making them easy to assemble and transport.

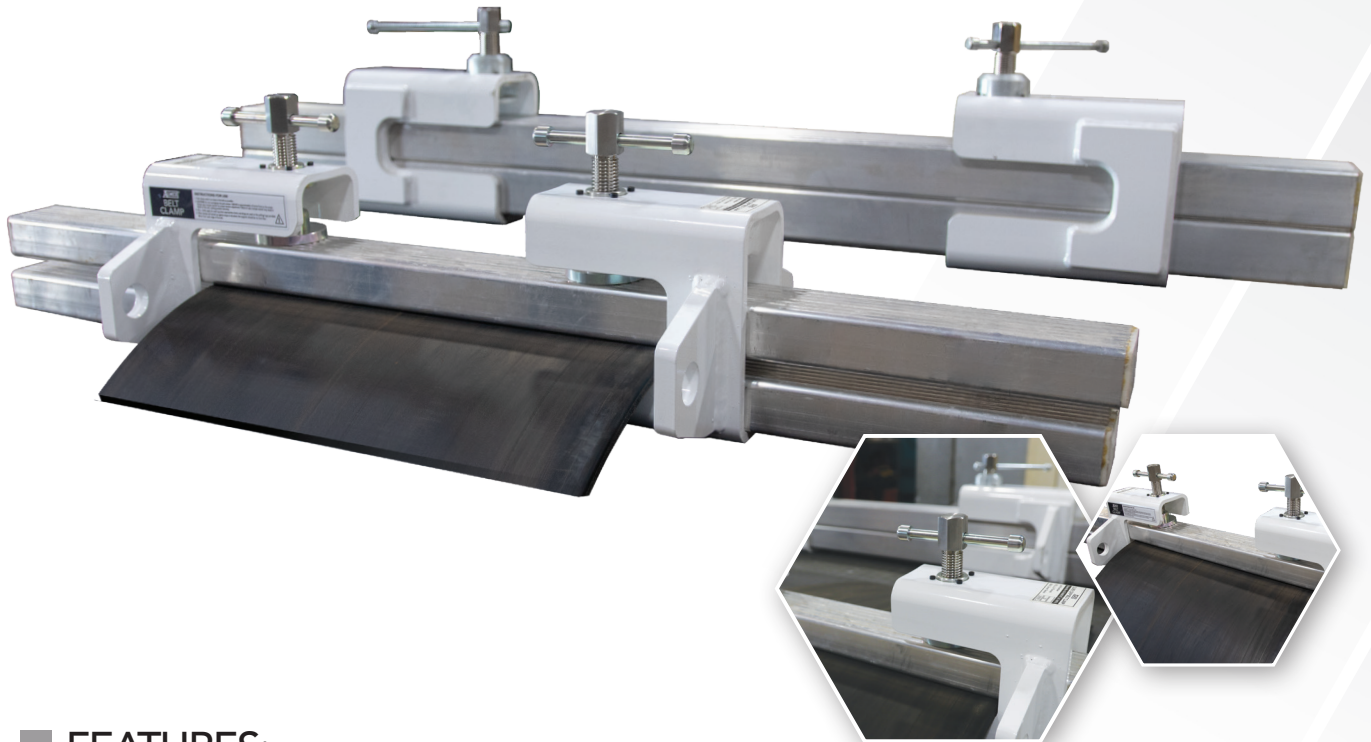

■ FEATURES:

- Almex Bar Clamp units, when linked in a tandem configuration, can generate up to 16 tonnes (38,000 Lbs.) of pulling force
- Bolts and handles are uniquely designed to stay assembled, minimizing loss during transport
- More than 50% lighter than competitive products; end brackets weigh 18 kg (40 Lbs.) each (MK2)
- Both sizes of clamps come with eyelets on both sides which facilitates using them in a tandem set-up, offering greater pulling force
- Custom sizes available

★ See back for Specifications & Dimensions

NA

Shaw Almex
Europe B.V.
☎ 31 646648648

Shaw Almex
Industries, Canada
☎ 1 905 643 7750

Shaw Almex
Industries, Canada
☎ 1 705 746 5884

Shaw Almex
Fusion, LLC, U.S.A.
☎ 1 404 292 8600

Shaw Almex
Africa (Pty) Ltd.
☎ 27 11 794 8262

 **ALMEX**
GROUP
www.almex.com 1.800.977.5423

ALMEX BAR CLAMP

SPECIFICATIONS:

MKR-2 (5 Tonne)

- Torque (Metric/Imperial) - 112 NM 37.6 kg / 83 Lbs.
- Force-Tonne/Clamp (Metric/Imperial) – (3719 kg / 8200 Lbs.)
- Total Tonne – Clamp Force on Belt (Metric/Imperial) - 7257 kg / 16000 Lbs.

MKR-3 (7 Tonne)

- Torque (Metric/Imperial) - 200 NM 68 kg / 150 Lbs.
- Force-Tonne/Clamp (Metric/Imperial) - 4309 kg / 9500 Lbs.
- Total Tonne – Clamp Force on Belt (Metric/Imperial) - 8618 kg / 19000 Lbs.

PRODUCT CODE	BAR LENGTH		BELT WIDTH		MAX THICKNESS	
	mm	in	mm	in	mm	in
MK2 - 5 Tonne						
MK2-900	1219	48"	900	36"	<1"	25
MK2-1200	1524	60"	1200	48"	<1"	25
MK2-1500	1829	72"	1500	60"	<1"	25
MK2-1800	2134	84"	1800	72"	<1"	25
MK2-2000	2286	90"	2000	78"	<1"	25
MK2-2200	2489	98"	2200	87"	<1"	25
MK2-2400	0000	00"	2400	94"	<1"	25

MK3 - 7 Tonne						
MK3-900	1219	48"	900	36"	<2"	50
MK3-1200	1524	60"	1200	48"	<2"	50
MK3-1500	1829	72"	1500	60"	<2"	50
MK3-1800	2134	84"	1800	72"	<2"	50
MK3-2000	2286	90"	2000	78"	<2"	50
MK3-2200	2489	98"	2200	87"	<2"	50
MK3-2400	0000	00"	2400	94"	<2"	50

*Other bar lengths are available on request as a special order.