

# ALMEX BELT WINDER & STAND TALL

Almex has a complete line of Belt Winders and Stands for all types of conveyors, belt sizes and lengths. Drawing on decades of field service experience, Almex winders are designed for the serious belt technician. The small and medium winders are designed to fit on your Chevy 3500 or Ford 350 truck to be your go-to, day-in-day-out winders, for most small belts.

Need to change a large overland or slope belt? You will need one or two of the powerful winders designed to be transported on a drop-deck truck without an oversize permit. Almex has the winder and stand solution to suit your needs.

The Almex Tall Winder and Stand are intended for large oblong rolls of belt. Due to the customer nature of this style of winder, they are designed to customer requirements.

## ■ FEATURES:

- Due to the custom nature of this style of winder, they are designed to customer requirements.
- The ultimate winder for oblong, racetrack, rolls.
- Used to re-roll a belt in the opposite direction for proper installation or roll up scrap belting on racetrack reals.
- Can be used to make "super reals" of 2, 3, or even 4 rolls of belting from the manufacturer.
- Not designed for high tension pulling.
- Stainless steel waterproof enclosures.
- available with electric VFD or hydraulic drive systems.
- Units are guarded and protected for operator safety.



SA

Almex Fusion de Mexico  
☎ 01 (477) 962 97 43

Almex Peru S.A.C.  
☎ 51 999 894040

Shaw Almex Chile SpA  
☎ +56 2 2 745 3969


Almex Indústria do Brasil Limitada  
☎ +51 31 3120 3737

 **ALMEX**  
GROUP  
www.almex.com 1.800.977.5423



**SPECIAL  
ORDER**

Belt Winders are designed and manufactured according to the specifications required. Call us to speak to a representative for quote and customized solution. Since Belt winders and stands are customized, orders may take longer to fulfill.

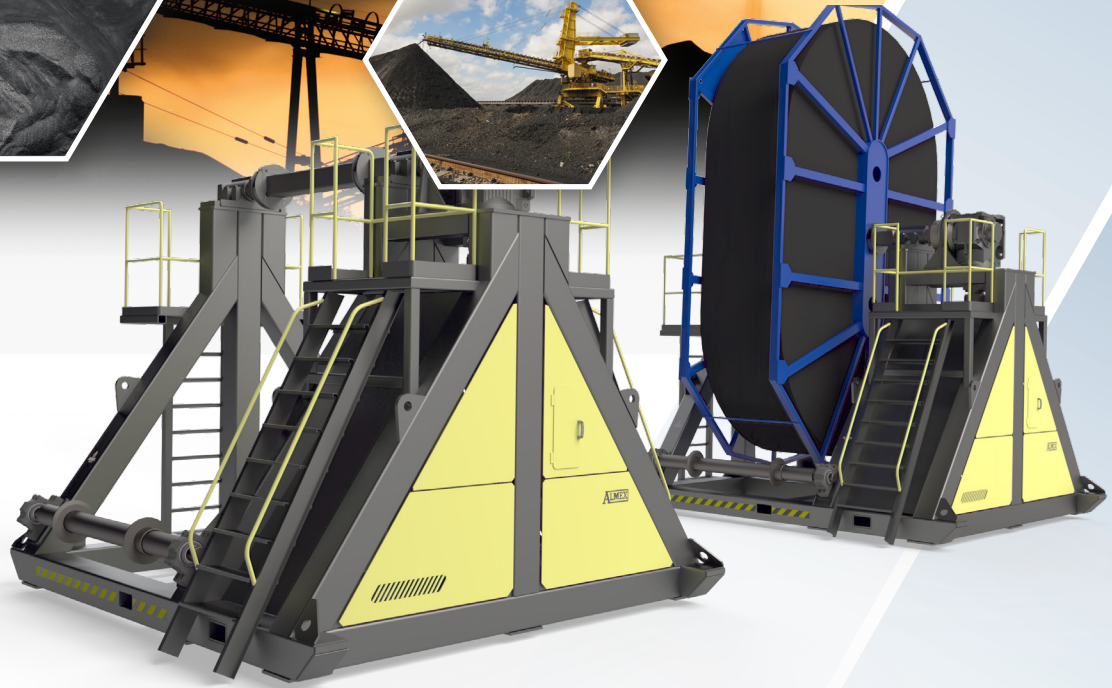

| Item                        | Specification          |
|-----------------------------|------------------------|
| <b>Reel Specifications</b>  |                        |
| Max Reel Weight             | 30 Tons                |
| Max Reel Diameter           | 5.5 M / 216"           |
| Max Belt Width              | 1625 mm / 64"          |
| <b>Winder Performance</b>   |                        |
| Line Pull at Hub            | 7.8 Tons @ 14"ø        |
| Line Pull at Max Diameter   | 0.5 Tons @ 216"ø       |
| Maximum Reeling Speed       | 5.8 RPM                |
| Drive Torque at Reel        | 10242 lb-ft / 13.9 kNm |
| <b>Drive Specifications</b> |                        |
| Electrical Motor Power      | 12.3 HP / 9.2 kW       |
| Motor Voltage               | 480 VAC                |
| <b>Equipment Dimensions</b> |                        |
| Length                      | 200"                   |
| Width                       | 170"                   |
| Height                      | 158"                   |
| Mass                        | TBD                    |

SA

Almex Fusion de Mexico  
☎ 01 (477) 962 97 43

Almex Peru S.A.C.  
☎ 51 999 894040

Shaw Almex Chile SpA  
☎ +56 2 2 745 3969

Almex Indústria do Brasil Limitada  
☎ +51 31 3120 3737


**ALMEX**  
GROUP  
www.almex.com 1.800.977.5423