

# BREAKER FABRIC

## SKIMMED

**Breaker Fabric** is available in skimmed, off balance and 200 Lbs. Steel Cord belt models.


Almex Breaker Fabric is a Leno Weave RFL treated fabric skimmed with uncured rubber for hot vulcanized belt splicing reinforcement. It is designed for use in step splicing and finger splicing of standard grade fabric belts.

### FEATURES:

- Enhances working life of steel cord belt splices
- Improves flexibility and strength of conveyor belt splices
- Eliminates surface contamination (normal application) with double-sided poly
- Uses poly colour coding system to identify the compound
- Almex Breaker Fabric poly is blue

### USES:

For Natural Rubber (NR), Polyisoprene (IR), Styrene-Butadiene (SBR), Polybutadiene (BR), Polychloroprene i.e. - Neoprene (CR) rubber belt splices.

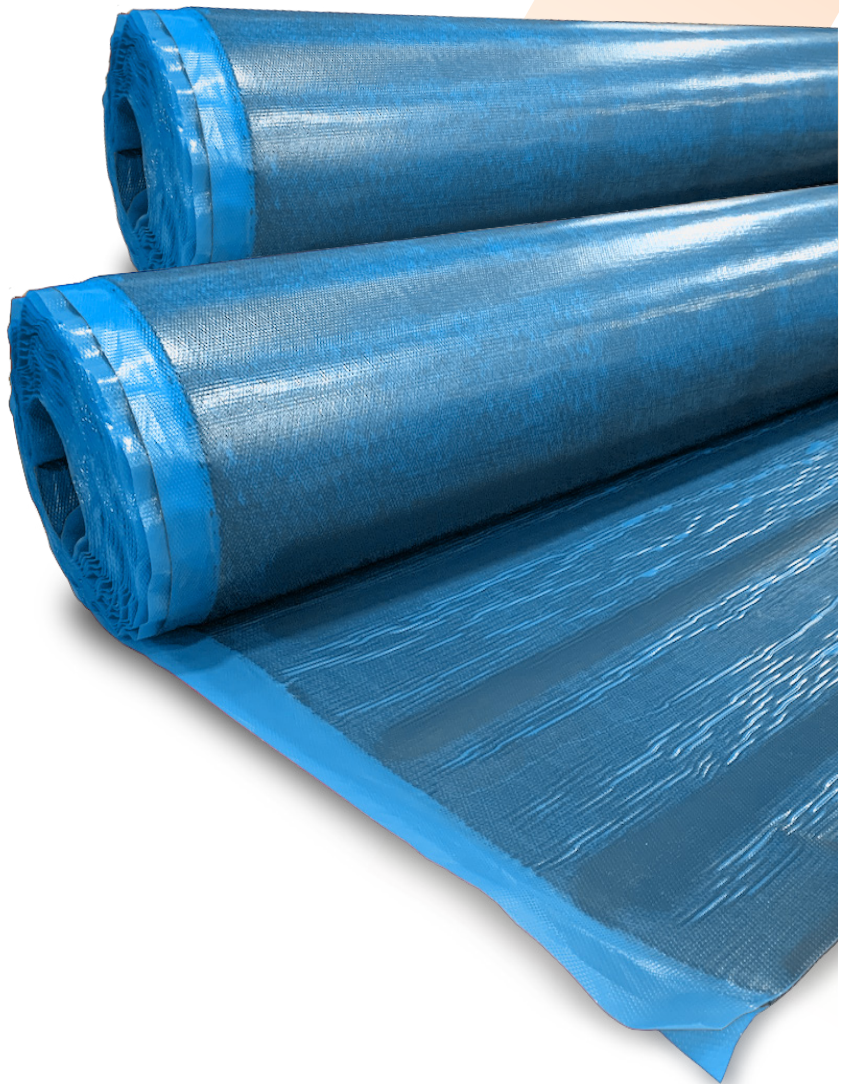

#### Product Information

##### Properties:

Rubber Colour: Black

Poly Colour: Blue (double sided)

Base Polymer: NR/SBR Rubber

Specific Gravity: 1.15 - 1.21

Hardness: 60 - 75 Shore A

Rubber Tensile: 2600 - 3200 psi

Rubber Elongation: 300 - 500 % (at break)

Shelf Life: 6 Months at 21°C (70 °F) or

12 Months at 10 °C (50 °F).

Fabric Type: Leno Weave Nylon (Warp & Weft)

Fabric Weight: 9.0 - 10oz per square yard

PRODUCT CODE	DESCRIPTION	DIMENSIONS - METRIC (TxWxL)	DIMENSIONS - IMPERIAL (TxWxL)	POLY COLOUR
AA-BFS-055	Skimmed	1.40 mm x 990.6 mm x 10058.4 mm	0.055" x 39" x 33'	Blue
AA-BFS-070	Skimmed	1.78 mm x 1168.4 mm x 9144.0 mm	0.070" x 46" x 30'	Red
AA-BFS-070-63	Skimmed	1.78 mm x 1600.2 mm x 9144.0 mm	0.070" x 63" x 30'	Red

NA

Shaw Almex  
Europe B.V.  
☎ 31 646648648

Shaw Almex  
Industries, Canada  
☎ 1 905 643 7750

Shaw Almex  
Industries, Canada  
☎ 1 705 746 5884

Shaw Almex  
Fusion, LLC, U.S.A.  
☎ 1 404 292 8600

Shaw Almex  
Africa (Pty) Ltd.  
☎ 27 11 794 8262

 **ALMEX**  
GROUP  
www.almex.com 1.800.977.5423