

BREAKER FABRIC

SKIMMED

Breaker Fabric is available in skimmed, off balance and 200 Lbs. Steel Cord belt models.


Almex Breaker Fabric is a Leno Weave RFL treated fabric skimmed with uncured rubber for hot vulcanized belt splicing reinforcement. It is designed for use in step splicing and finger splicing of standard grade fabric belts.

FEATURES:

- Enhances working life of steel cord belt splices
- Improves flexibility and strength of conveyor belt splices
- Eliminates surface contamination (normal application) with double-sided poly
- Uses poly colour coding system to identify the compound
- Almex Breaker Fabric poly is blue

USES:

For Natural Rubber (NR), Polyisoprene (IR), Styrene-Butadiene (SBR), Polybutadiene (BR), Polychloroprene i.e. - Neoprene (CR) rubber belt splices.

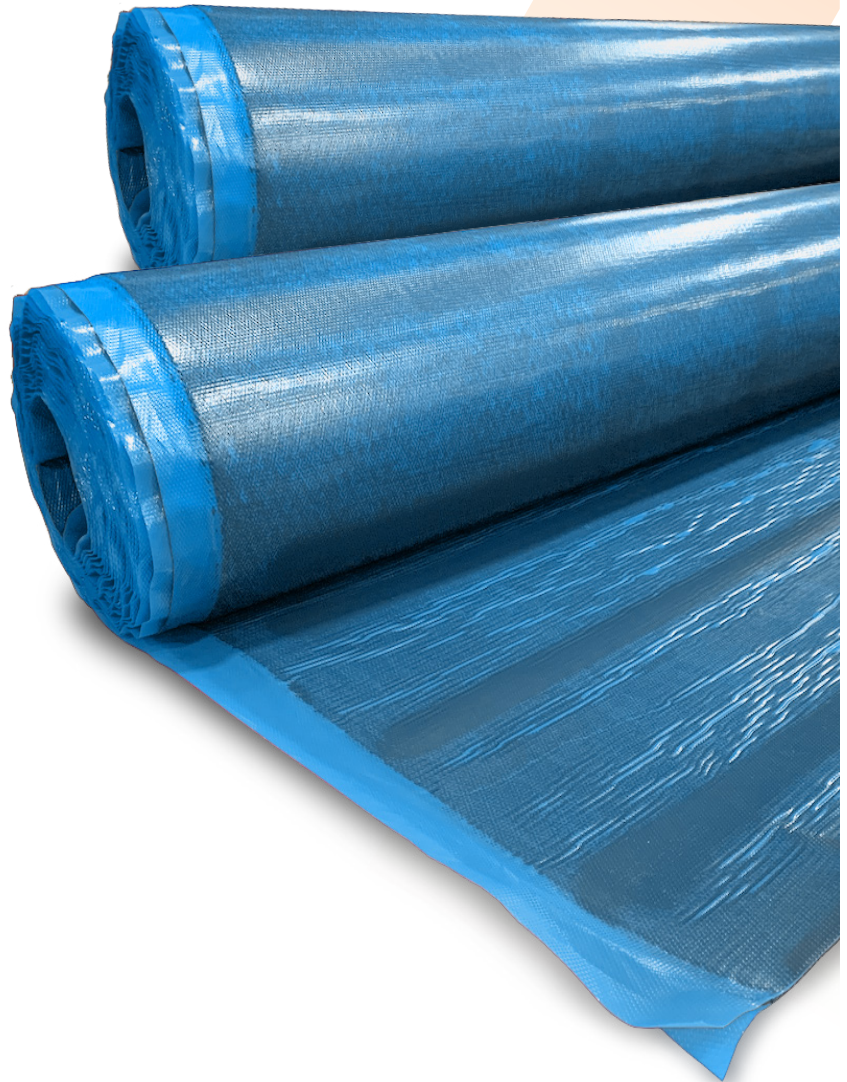

Product Information

Properties:

Rubber Colour: Black

Poly Colour: Blue (double sided)

Base Polymer: NR/SBR Rubber

Specific Gravity: 1.15 - 1.21

Hardness: 60 - 75 Shore A

Rubber Tensile: 2600 - 3200 psi

Rubber Elongation: 300 - 500 % (at break)

Shelf Life: 6 Months at 21°C (70 °F) or

12 Months at 10 °C (50 °F).

Fabric Type: Leno Weave Nylon (Warp & Weft)

Fabric Weight: 9.0 - 10oz per square yard

PRODUCT CODE	DESCRIPTION	DIMENSIONS - METRIC (TxWxL)	DIMENSIONS - IMPERIAL (TxWxL)	POLY COLOUR
AA-BFS-055	Skimmed	1.40 mm x 990.6 mm x 10058.4 mm	0.055" x 39" x 33'	Blue
AA-BFS-070	Skimmed	1.78 mm x 1168.4 mm x 9144.0 mm	0.070" x 46" x 30'	Red
AA-BFS-070-63	Skimmed	1.78 mm x 1600.2 mm x 9144.0 mm	0.070" x 63" x 30'	Red

GL

Shaw Almex
Mining Equip. (Tianjin) Co. Ltd.
☎ +86 (22) 2388-9075

PT. Shaw Almex
Indonesia
☎ +61 488 780243

Shaw Almex
Pacific Pty Ltd. Qld
☎ 61 7 4774 2011

Shaw Almex
Pacific Pty Ltd. WA
☎ 61 8 9358 5860

Shaw Almex
India PVT. Ltd.
☎ 91-129-2274624

 **ALMEX**
GROUP
www.almex.com 1.800.977.5423