

...IT'S ABOUT GETTING
INLINE!


CERAFLEX

PREMIUM CERAMIC LAGGING

CeraFlex Ceramic Lagging offers excellent performance on smaller pulleys with less stress. The in-line tile arrangement is perfect for lower tension T1 belts. CeraFlex Lagging has (20 mm x 20 mm) 3/4" x 3/4" inline tiles with a channel between rows for wet or mud diversion for better pulley/belt contact.

FEATURES:

- Easy-to-use, in-place installation eliminates the need to remove the pulley from the conveyor system, meaning less downtime
- Featuring our Fusion Systems proprietary bonding layer technology significantly enhancing the bond between the lagging and the pulley shell
- Superior abrasion-resistance
- Tiles are bonded to the rubber on the bottom and all four sides, providing excellent performance in wet, dry or wet/muddy applications where slippage can occur
- 38% ceramic contact surface with the belt
- Available in 12 and 15 mm (1/2" and 5/8") thicknesses
- Compatible with a range of pulleys
- Compatible with Fusion adhesives
- Improved belt tracking
- Lower cost per ton
- Width 196 mm (7.75")
- 5 Year Tile Retention Warranty

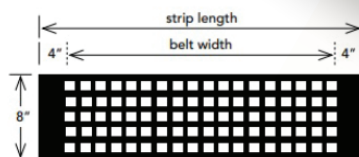

PRODUCT CODE CL-CF-{THICKNESS}{BELTWIDTH} -{FRAS, MSHA} {SMOOTH TILE}	BELT WIDTH (METRIC/IMPERIAL)	CERAMIC LENGTH (METRIC/IMPERIAL)	OVERALL LENGTH (METRIC/IMPERIAL)
CL-CF-xx18-xx{x}	457 mm / 18"	457 mm / 18"	660 mm / 26"
CL-CF- xx24-xx{x}	610 mm / 24"	610 mm / 24"	813 mm / 32"
CL-CF- xx30-xx{x}	762 mm / 30"	762 mm / 30"	965 mm / 38"
CL-CF- xx36-xx{x}	914 mm / 36"	914 mm / 36"	1118 mm / 44"
CL-CF- xx42-xx{x}	1067 mm / 42"	1067 mm / 42"	1270 mm / 50"
CL-CF- xx48-xx{x}	1219 mm / 48"	1219 mm / 48"	1422 mm / 56"
CL-CF- xx54-xx{x}	1372 mm / 54"	1372 mm / 54"	1575 mm / 62"
CL-CF- xx60-xx{x}	1524 mm / 60"	1524 mm / 60"	1727 mm / 68"
CL-CF- xx66-xx{x}	1676 mm / 66"	1676 mm / 66"	1880 mm / 74"
CL-CF- xx72-xx{x}	1829 mm / 72"	1829 mm / 72"	2032 mm / 80"
CL-CF- xx78-xx{x}	1981 mm / 78"	1981 mm / 78"	2184 mm / 86"
CL-CF- xx84-xx{x}	2134 mm / 84"	2134 mm / 84"	2334 mm / 92"
CL-CF- xx90-xx{x}	2184 mm / 86"	2184 mm / 86"	2388 mm / 94"
CL-CF- xx96-xx{x}	2438 mm / 96"	2438 mm / 96"	2642 mm / 104"

HOW TO ORDER

{thickness} = thickness of lagging:
'12' – 12 mm (1/2"), '15' – 15 mm (5/8") thick

{FRAS, MSHA} = Optional requirement for grade of lagging rubber: 'FR' for FRAS, or 'MS' for MSHA if required

{tile} = 'S' – smooth 20 mm (3/4") square ceramic tiles for non-drive pulleys appended to the end. No letter added for dimpled 20 mm (3/4") square ceramic tiles

For example, **CL-CF-1218S** would be a 460 mm (18") belt width, smooth tile, 12 mm (1/2") thick lagging, with no FRAS or MSHA requirement. If the lagging needed to be MSHA-grade, it would be CL-CF-1218-MSS.

The number of strips or roll length can then be determined based on the pulley diameter.

GL

Shaw Almix
Mining Equip. (Tianjin) Co. Ltd.
☎ +86 (22) 2388-9075

PT. Shaw Almix
Indonesia
☎ +61 488 780243

Shaw Almix
Pacific Pty Ltd. Qld
☎ 61 7 4774 2011

Shaw Almix
Pacific Pty Ltd. WA
☎ 61 8 9358 5860

Shaw Almix
India PVT. Ltd.
☎ 91-129-2274624

ALMEX
GROUP
www.almex.com 1.800.977.5423