


URDS-SP

STRIPLAGG

Fusion StripLagg URDS-SP (Universal Rubber Drive System - Small Pattern) is a smaller profile pulley lagging, based on the original URDS triangular profile, ideal for smaller drive pulleys with low to medium tension.

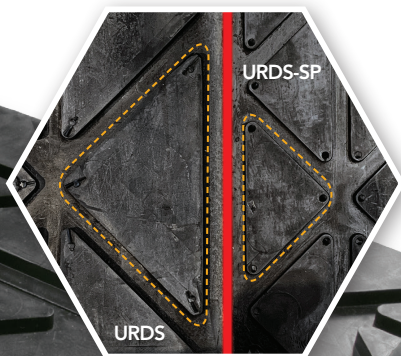

FEATURES:

- FusionLagg URDS-SP is designed to be applied to the pulley with the grooves in the lagging running horizontal to the pulley face
- Featuring our **Fusion Systems proprietary bonding layer technology** significantly enhancing the bond between the lagging and the pulley shell
- The profile pattern provides effective surface contact with the conveyor belt
- The open area or spacing between the profiles effectively removes product fines, moisture and water when present on the system
- Exceptional belt tracking, creating exceptional wear life
- Fusion bonding layer technology provide superior adhesion to the pulley face
- Easy to install
- Better system up-time, lowering operational expenses
- Universal rubber sheet offers little or no waste
- Small diamond profile material provided in 305 mm (12") wide strips
- Available in 12 mm (1/2") thickness

PROPERTIES:

Colour: Black
Elastomer: NR/BR
Tensile Strength: 20 Mpa 2700 psi
Elongation at Break: 500 %
Density: 1.12 g / cm³
Hardness: 60 (±5) Shore A
Abrasion Resistance: <105 mm3

HOW TO ORDER

For example, **FL-SURDS-SP-1218** would be a 460 mm (18") belt width, 12 mm (1/2") thick lagging, with no FRAS or MSHA requirement. If the lagging needed to be MSHA-grade, it would be **FL-SURDS-SP-1218-MSHA**.

PRODUCT CODE (APPEND 'FR' FOR FRAS, OR 'MSHA' FOR MSHA GRADE)	BELT WIDTH (METRIC/IMPERIAL)	OVERALL STRIP LENGTH (METRIC/IMPERIAL)
FL-SURDS-SP-1218	457 mm / 18"	660 mm / 26"
FL-SURDS- SP-1224	610 mm / 24"	813 mm / 32"
FL-SURDS- SP-1230	762 mm / 30"	965 mm / 38"
FL-SURDS- SP-1236	914 mm / 36"	1118 mm / 44"
FL-SURDS- SP-1242	1067 mm / 42"	1270 mm / 50"
FL-SURDS- SP-1248	1219 mm / 48"	1422 mm / 56"
FL-SURDS- SP-1254	1372 mm / 54"	1575 mm / 62"
FL-SURDS- SP-1260	1524mm / 60"	1727 mm / 68"
FL-SURDS- SP-1266	1676 mm / 66"	1880 mm / 74"
FL-SURDS- SP-1272	1829 mm / 72"	2032 mm / 80"
FL-SURDS- SP-1278	1981 mm / 78"	2184 mm / 86"
FL-SURDS- SP-1284	2134 mm / 84"	2334 mm / 92"
FL-SURDS- SP-1286	2184 mm / 86"	2388 mm / 94"
FL-SURDS- SP-1296	2438 mm / 96"	2642 mm / 104"

*All lagging sizes are also available in FRAS/MSHA grade rubber and materials on request.

GL

Shaw Almex
Mining Equip. (Tianjin) Co. Ltd.
☎ +86 (22) 2388-9075

PT. Shaw Almex
Indonesia
☎ +61 488 780243

Shaw Almex
Pacific Pty Ltd. Qld
☎ 61 7 4774 2011

Shaw Almex
Pacific Pty Ltd. WA
☎ 61 8 9358 5860

Shaw Almex
India PVT. Ltd.
☎ 91-129-2274624

ALMEX
GROUP
www.almex.com 1.800.977.5423