


FILLER RUBBER

Fusion Filler Rubber is excellent for replacing damaged or worn layers in a conveyor belt when building up a repair. The bonding layer on both sides can be layered to provide exceptional adhesion to top and bottom materials.

FEATURES:

- Higher abrasion index than most belt covers
- Special Fusion Systems Bonding layer compound
- Recommended for repair of conveyor belts and some tank linings (under certain conditions)
- Use with Fusion Cover Rubber compound and Adhesive (SA 2000+, SA 4000+ or ECRF)

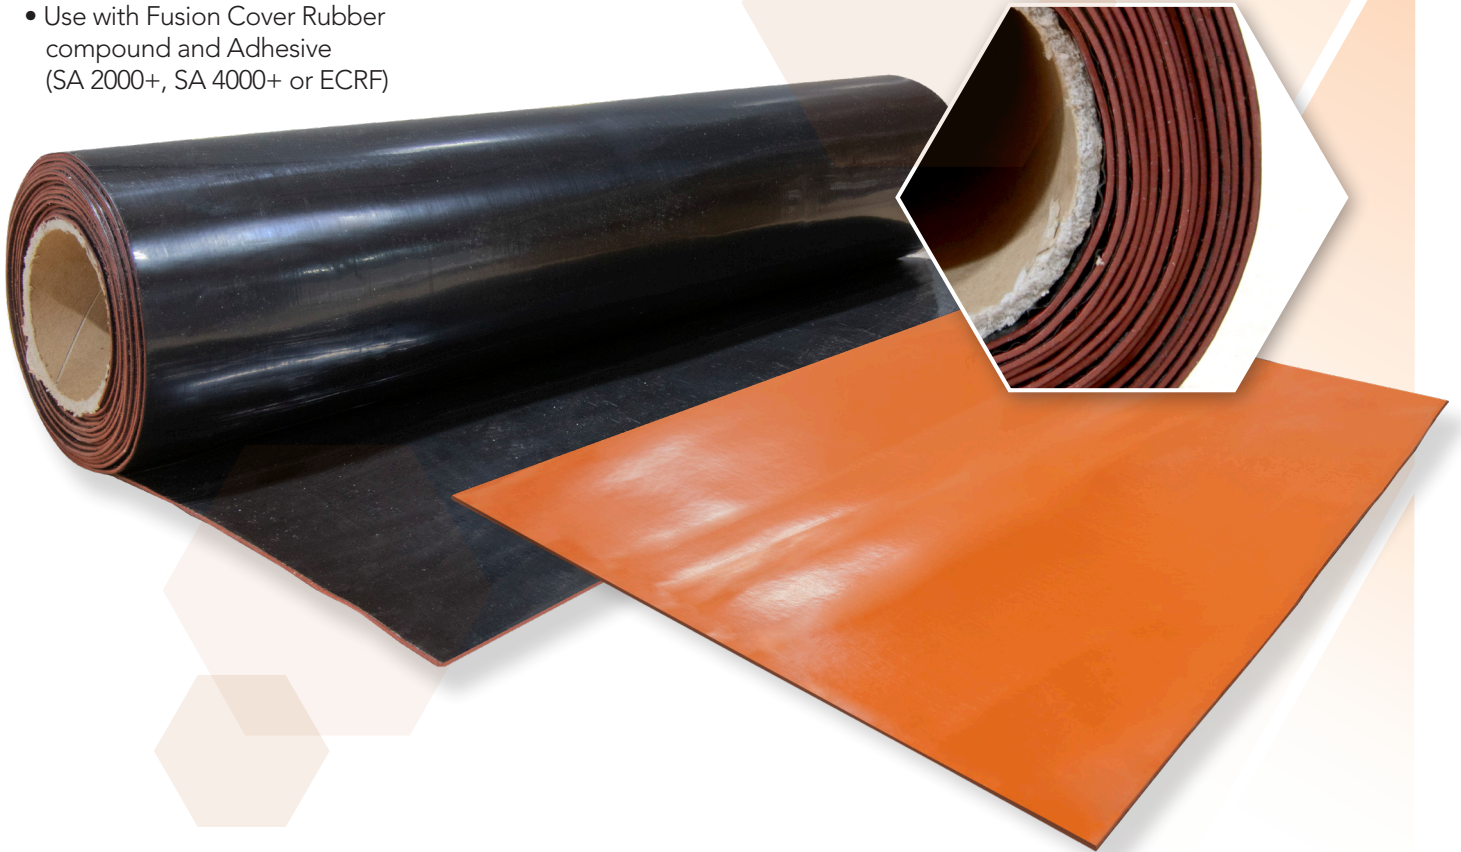

PRODUCT CODE	DIMENSIONS - METRIC (T×W×L)	DIMENSIONS - IMPERIAL (T×W×L)
CR-FRB-0616	1.5 mm x 500 mm x 5 M	1/16" x 20" x 16'
CR-FRB-1216	3 mm x 500 mm x 5 M	1/8" x 20" x 16'
CR-FRB-0633	6 mm x 500 mm x 5 M	1/4" x 20" x 16'

NA

Shaw Almex
Europe B.V.

☎ 31 646648648
Drachten, The Netherlands

Shaw Almex
Industries

☎ 1 905 643 7750
Stoney Creek, Ontario

Shaw Almex
Industries

☎ 1 705 746 5884
Parry Sound, Ontario

Shaw Almex
Fusion, LLC.

☎ 1 404 292 8600
Decatur, Georgia, USA

Shaw Almex
Africa (Pty) Ltd.

☎ 27 11 794 8262
South Africa



1.800.977.5423
www.almex.com

Shaw
Almex
Industries Ltd.

sales@almex.com