
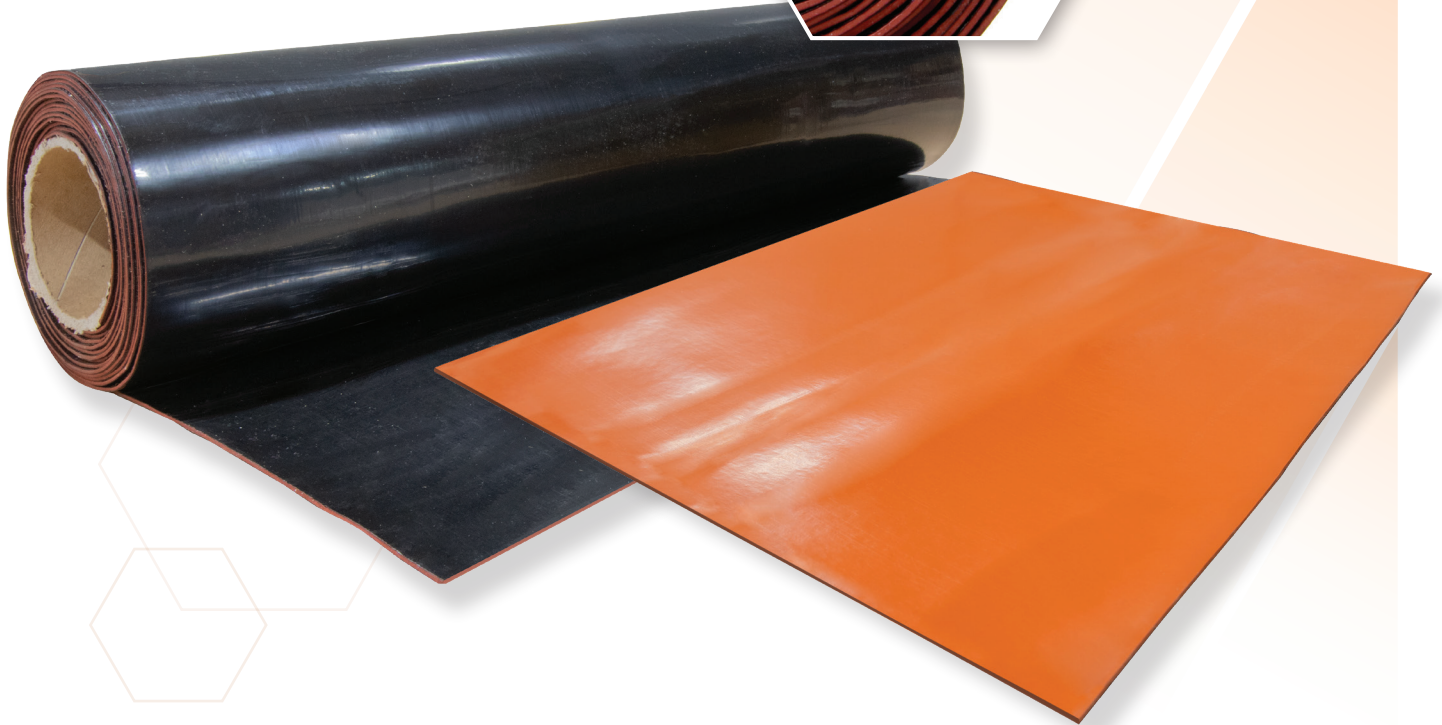


FILLER RUBBER

Fusion Filler Rubber is excellent for replacing damaged or worn layers in a conveyor belt when building up a repair. The bonding layer on both sides can be layered to provide exceptional adhesion to top and bottom materials.

FEATURES:

- Higher abrasion index than most belt covers
- Special Fusion Systems Bonding layer compound
- Recommended for repair of conveyor belts and some tank linings (under certain conditions)
- Use with Fusion Cover Rubber compound and Adhesive (SA 2000+, SA 4000+ or ECRF)

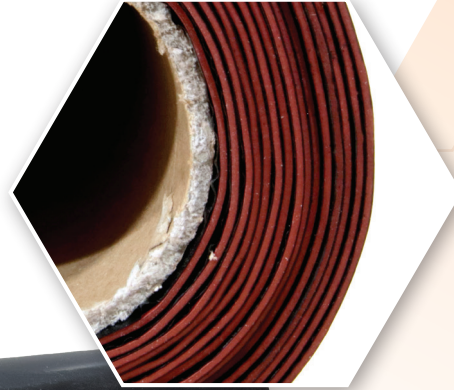

PRODUCT CODE	DIMENSIONS - METRIC (T x W x L)	DIMENSIONS - IMPERIAL (T x W x L)
CR-FRB-0616	1.5 mm x 500 mm x 5 M	1/16" x 20" x 16'
CR-FRB-1216	3 mm x 500 mm x 5 M	1/8" x 20" x 16'
CR-FRB-0633	6 mm x 500 mm x 5 M	1/4" x 20" x 16'

GL

Shaw Almex
Mining Equip. (Tianjin) Co. Ltd.
☎ +86 (22) 2388-9075

PT. Shaw Almex
Indonesia
☎ +61 488 780243

Shaw Almex
Pacific Pty Ltd. Qld
☎ 61 7 4774 2011

Shaw Almex
Pacific Pty Ltd. WA
☎ 61 8 9358 5860

Shaw Almex
India PVT. Ltd.
☎ 91-129-2274624

 **ALMEX**
GROUP
www.almex.com 1.800.977.5423