


SPLICING FOIL

Fusion Splicing Foil is excellent for replacing damaged or worn layers in a conveyor belt when building up a repair. Use in conjunction with Fusion Cover Rubber compound.

FEATURES:

- Higher abrasion index than most belt covers
- Recommended for use in cold splicing of conveyor belts
- Bonding layer compound
- Recommended for repair of conveyor belts or tank linings (under certain conditions)
- Use in conjunction with Fusion Cover Rubber compound, and SA 2000+, SA 4000+ or ECRF adhesives

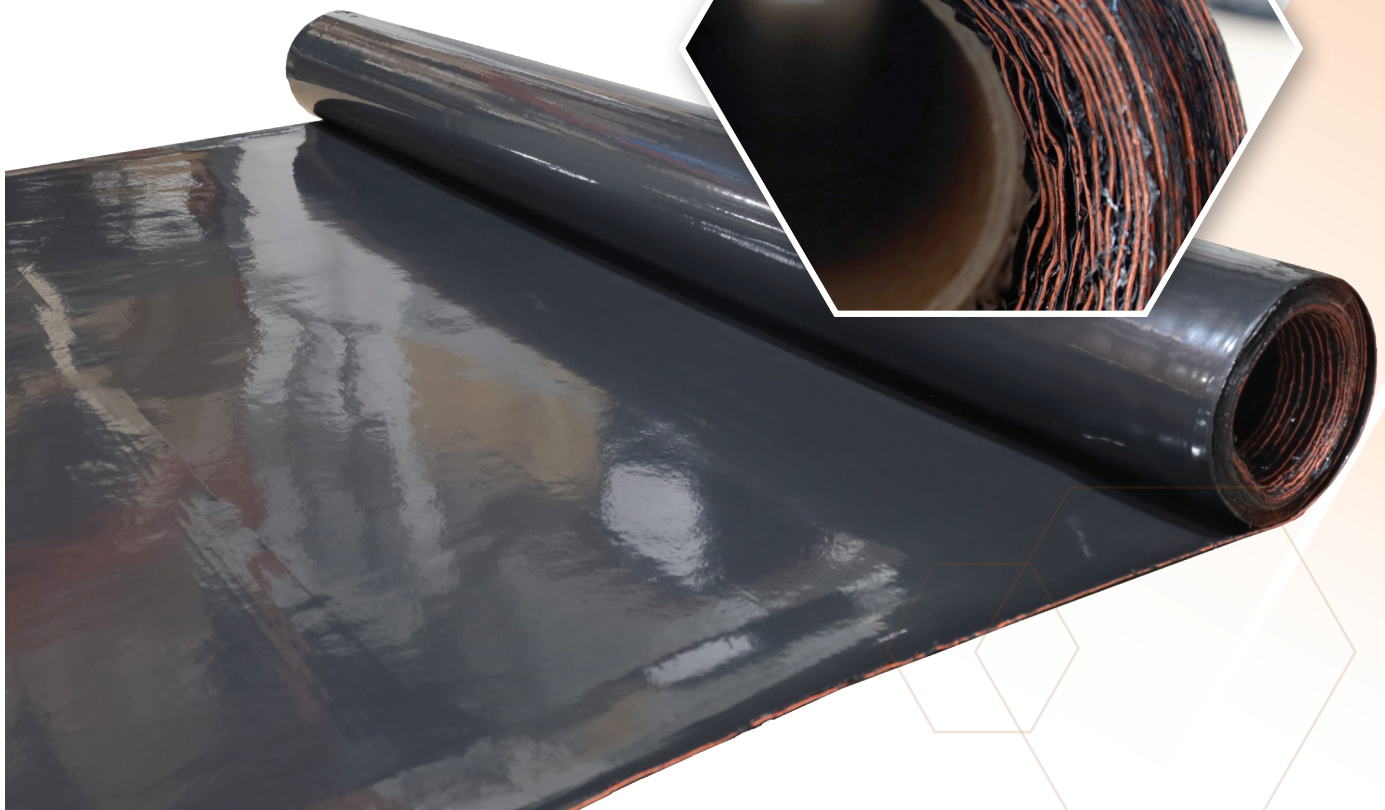

PRODUCT CODE	DIMENSIONS - METRIC (TxWxL)	DIMENSIONS - IMPERIAL (TxWxL)
CF-SF-032316	0.08 mm x 500 mm x 5 M	1/32" x 20" x 16.5'
CF-SF-032333	0.08 mm x 500 mm x 10 M	1/32" x 20" x 33'

NA

Shaw Almex
Europe B.V.
☎ 31 646648648

Shaw Almex
Industries, Canada
☎ 1 905 643 7750

Shaw Almex
Industries, Canada
☎ 1 705 746 5884

Shaw Almex
Fusion, LLC, U.S.A.
☎ 1 404 292 8600

Shaw Almex
Africa (Pty) Ltd.
☎ 27 11 794 8262

 **ALMEX**
GROUP
www.almex.com 1.800.977.5423