


SPLICING FOIL

Fusion Splicing Foil is excellent for replacing damaged or worn layers in a conveyor belt when building up a repair. Use in conjunction with Fusion Cover Rubber compound.

FEATURES:

- Higher abrasion index than most belt covers
- Recommended for use in cold splicing of conveyor belts
- Bonding layer compound
- Recommended for repair of conveyor belts or tank linings (under certain conditions)
- Use in conjunction with Fusion Cover Rubber compound, and SA 2000+, SA 4000+ or ECRF adhesives

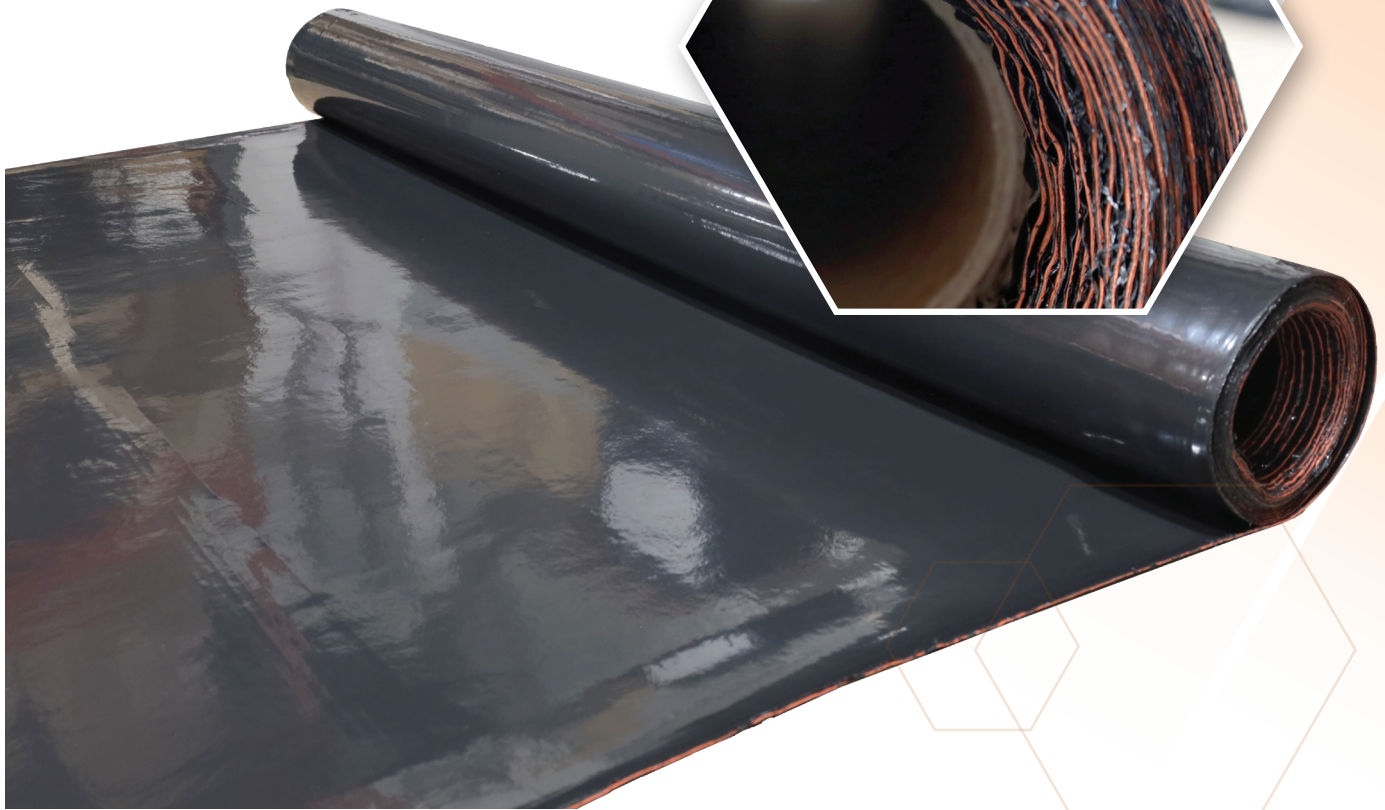

PRODUCT CODE	DIMENSIONS - METRIC (TxWxL)	DIMENSIONS - IMPERIAL (TxWxL)
CF-SF-032316	0.08 mm x 500 mm x 5 M	1/32" x 20" x 16.5'
CF-SF-032333	0.08 mm x 500 mm x 10 M	1/32" x 20" x 33'

GL

Shaw Almex
Mining Equip. (Tianjin) Co. Ltd.
☎ +86 (22) 2388-9075

PT. Shaw Almex
Indonesia
☎ +61 488 780243

Shaw Almex
Pacific Pty Ltd. Qld
☎ 61 7 4774 2011

Shaw Almex
Pacific Pty Ltd. WA
☎ 61 8 9358 5860

Shaw Almex
India PVT. Ltd.
☎ 91-129-2274624

 **ALMEX**
GROUP
www.almex.com 1.800.977.5423