


BELT CLEANING

BRUSH PAD

The **Belt Cleaning Brush Pad** offers a unique solution to cleaning belts with a profiled surface including those with sidewalls and cleats. It removes material buildup efficiently and can be easily installed.

FEATURES:

- Works very well on cleaning products that are profiled and require deburring
- A flat pad with 2" fingers which can be adhered to a shaft and mounted in the pulley area
- Back surface already prepared for easy installation
- Works in belt cleaning applications such as chip belts in pulp and paper and cleaning cement blocks
- Can be mounted on an existing pulley
- Made with Flame Resistant material

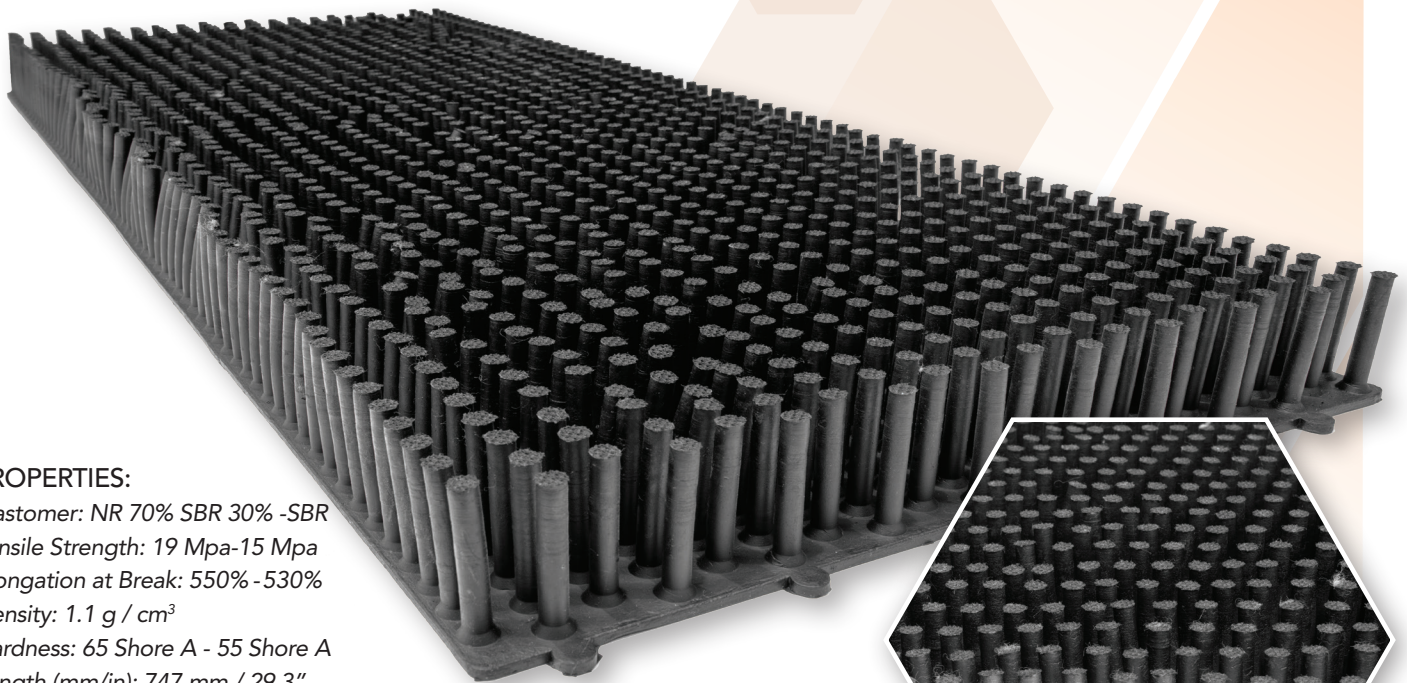

PROPERTIES:

Elastomer: NR 70% SBR 30% -SBR

Tensile Strength: 19 Mpa-15 Mpa

Elongation at Break: 550% -530%

Density: 1.1 g / cm³

Hardness: 65 Shore A - 55 Shore A

Length (mm/in): 747 mm / 29.3"

Width (mm/in): 300 mm / 11.75"

Height (mm/in): 50 mm / 2"

PRODUCT CODE	DIMENSIONS - METRIC (TxWxL)	DIMENSIONS - IMPERIAL (TxWxL)
CCRFR-RBP-001FR	300 mm x 747 mm x 50 mm	11.75" x 29.3" x 2"

NA

Shaw Almex
Europe B.V.

☎ 31 646648648
Drachten, The Netherlands

Shaw Almex
Industries

☎ 1 905 643 7750
Stoney Creek, Ontario

Shaw Almex
Industries

☎ 1 705 746 5884
Parry Sound, Ontario

Shaw Almex
Fusion, LLC.

☎ 1 404 292 8600
Decatur, Georgia, USA

Shaw Almex
Africa (Pty) Ltd.

☎ 27 11 794 8262
South Africa



ALMEX
GROUP

Shaw
Almex
Industries Ltd.

1.800.977.5423
www.almex.com

sales@almex.com