

SLITTER

The Almex Lightweight Slitter is designed for easy longitudinal cutting of conveyor belts up to 3 meters wide. While most belt slitting units require a vast amount of floor space, the Almex Lightweight slitter has a small footprint. No belt tension or floor track is required, ensuring a quick setup and increased productivity.

FEATURES:

- Pneumatic roller tensioner to keep coils tight
- 0-30 m/min cutting speed
- Reversible variable speed drives
- Manual tracking fence to control alignment
- Manual adjustable-feed belt fence
- Fix blade with knife mounted on moveable toolbar
- Powered side shift
- Easy-load chuck for coil drop-in
- Accommodates belts up to 2 meters or 3 meters - Wider available as a custom order
- Custom power supply
- 1 HP or 2 HP option
- Digital length counter




PROPERTIES:

2 M SLITTER

- Width: 2.7 M (106.3")
- Length: 1.2 M (47")
- Voltage: 220 3Ph
- Weight: 200 kg (441 Lbs.)
- Max Width: 2.3 M (90.6")
- Speed: 0-28 RPM
- Max Load: 2750 kg (6063 Lbs.)
- Max Thickness: 11.11 mm (0.44")
- Min Length: n/a

3 M SLITTER

- Width: 3.7 M (146")
- Length: 1.4 M (55")
- Voltage: 220 3Ph
- Weight: 300 kg (661.4 Lbs.)
- Speed: 0-28 RPM
- Max Load: 3500 kg (7716 Lbs.)
- Max Thickness: 11.11 mm (0.44")
- Min Length: n/a

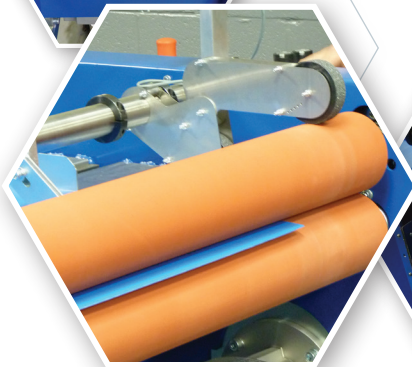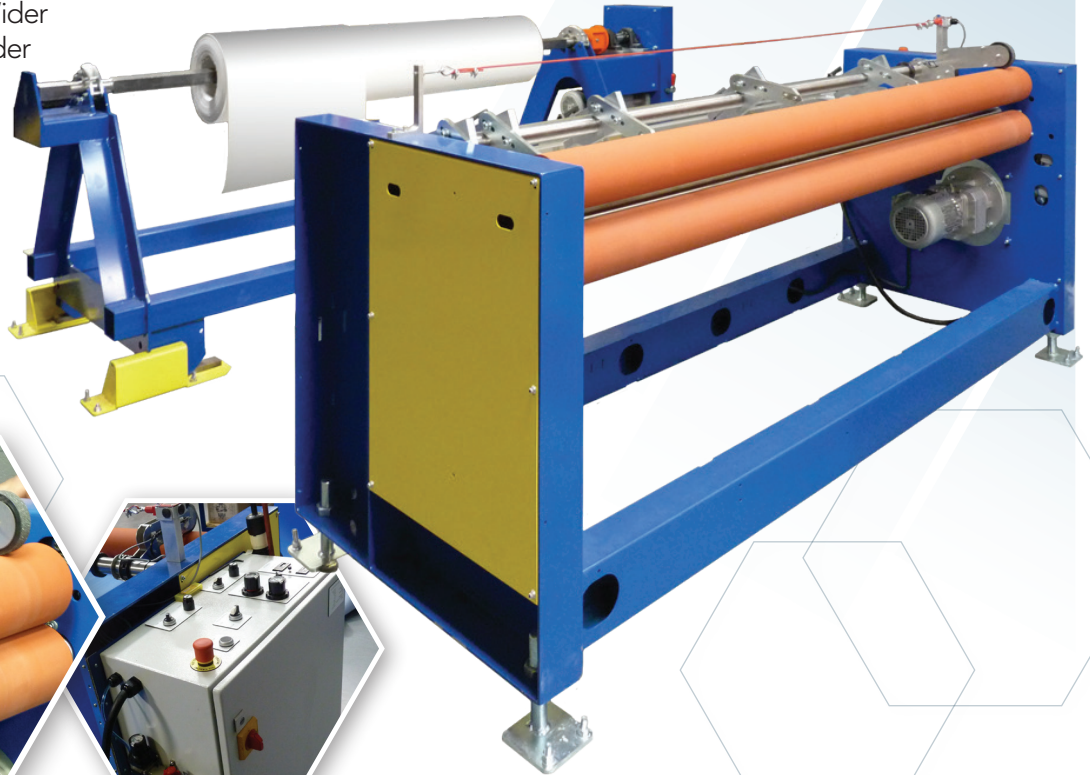

GL

Shaw Almex
Mining Equip. (Tianjin) Co. Ltd.
☎ +86 (22) 2388-9075

PT. Shaw Almex
Indonesia
☎ +61 488 780243

Shaw Almex
Pacific Pty Ltd. Qld
☎ 61 7 4774 2011

Shaw Almex
Pacific Pty Ltd. WA
☎ 61 8 9358 5860

Shaw Almex
India PVT. Ltd.
☎ 91-129-2274624

 **ALMEX**
GROUP
www.almex.com 1.800.977.5423