

TSE

TREAD SPLICER

The Almex TSE Tread Splicer is built and sized to vulcanize tire treads seamlessly in a 20 minute cure. A tread molds can be installed on the lower platen mounting plates quickly and easily.

FEATURES:

- Almex pressure bag and platens
- T locking handle
- 100 psi (7kg/cm²) maximum pressure



SPECIFICATIONS:

TSE-1018-100

- 1011 mm x 333.4 mm x 606.6 mm (39 13/16" x 13 1/8" x 23 7/8")
- 457.2 mm (18") x 311.2 mm (12 1/4") platen
- 76.5 mm (3") daylight opening

TSE-1218-100

- 931.62 mm x 282.58 mm x 597.72 mm (36 11/16" x 11 1/8" x 23 17/32")
- 457.2 mm (18") x 260.35 mm (10 1/4") platen
- 76.5 mm (3") daylight opening

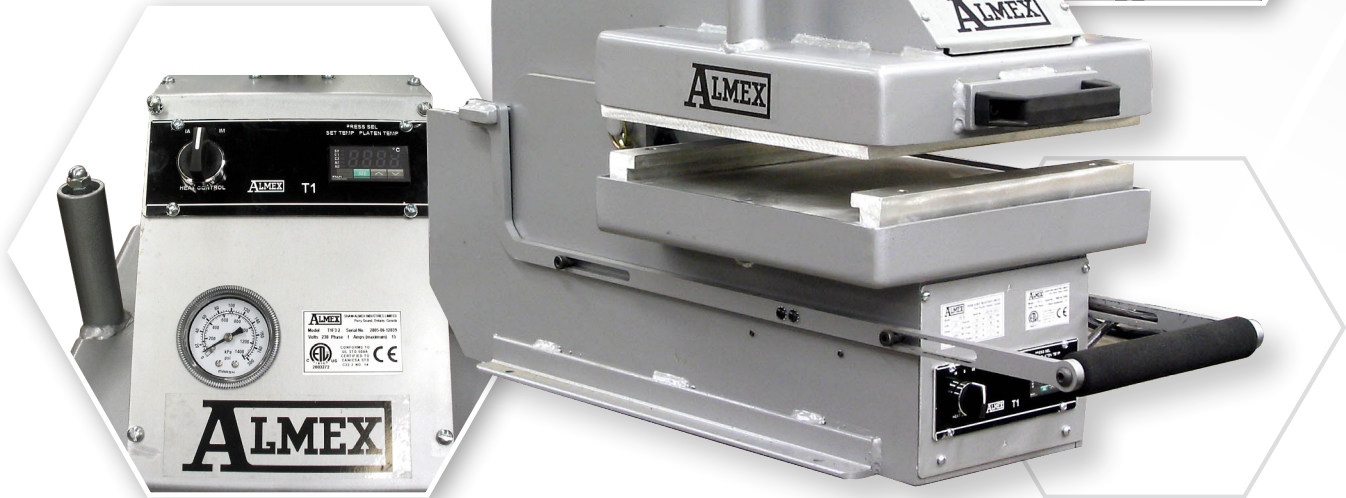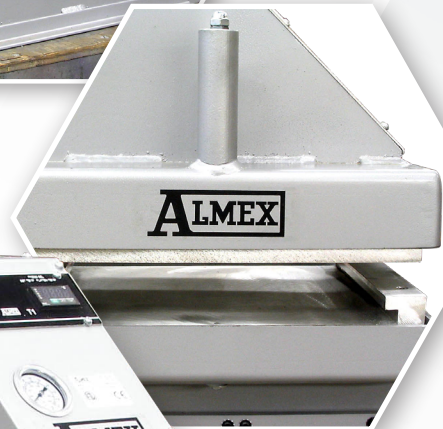

NA

Shaw Almex
Europe B.V.
☎ 31 646648648

Shaw Almex
Industries, Canada
☎ 1 905 643 7750

Shaw Almex
Industries, Canada
☎ 1 705 746 5884

Shaw Almex
Fusion, LLC. U.S.A.
☎ 1 404 292 8600

Shaw Almex
Africa (Pty) Ltd.
☎ 27 11 794 8262

 **ALMEX**
GROUP
www.almex.com 1.800.977.5423