

# TSE

## TREAD SPLICER

The Almex TSE Tread Splicer is built and sized to vulcanize tire treads seamlessly in a 20 minute cure. A tread molds can be installed on the lower platen mounting plates quickly and easily.

### FEATURES:

- Almex pressure bag and platens
- T locking handle
- 100 psi (7kg/cm<sup>2</sup>) maximum pressure



### SPECIFICATIONS:

#### TSE-1018-100

- 1011 mm x 333.4 mm x 606.6 mm (39 13/16" x 13 1/8" x 23 7/8")
- 457.2 mm (18") x 311.2 mm (12 1/4") platen
- 76.5 mm (3") daylight opening

#### TSE-1218-100

- 931.62 mm x 282.58 mm x 597.72 mm (36 11/16" x 11 1/8" x 23 17/32")
- 457.2 mm (18") x 260.35 mm (10 1/4") platen
- 76.5 mm (3") daylight opening

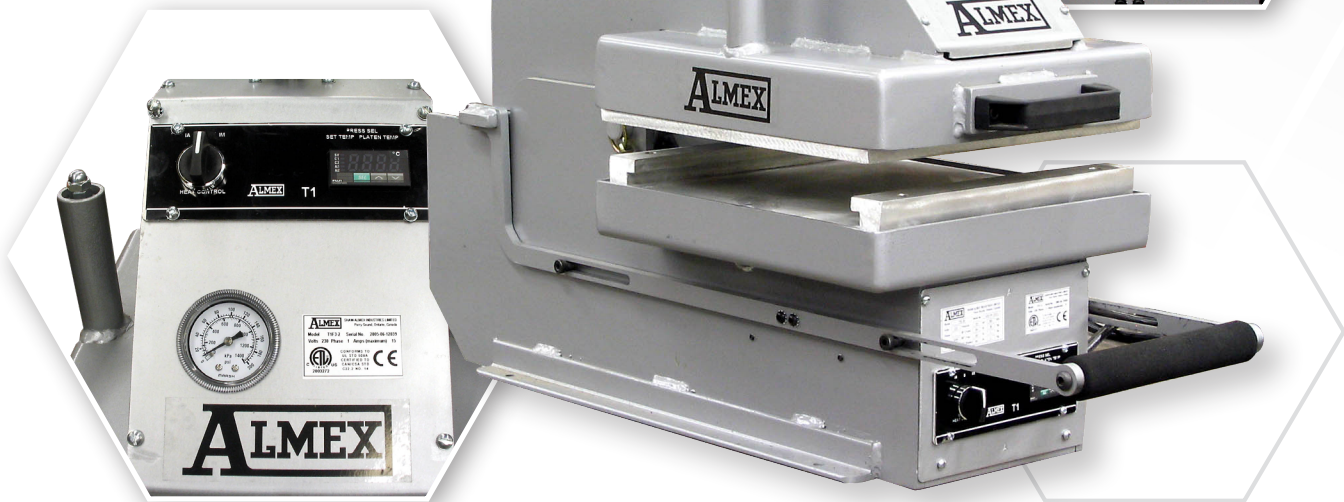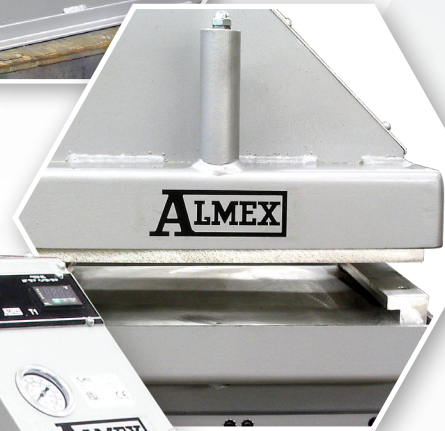

SA

Almex Fusion de Mexico  
☎ 01 (477) 962 97 43

Almex Peru S.A.C.  
☎ 51 999 894040

Shaw Almex Chile SpA  
☎ +56 2 2 745 3969

Almex Indústria do Brasil Limitada  
☎ +51 31 3120 3737


**ALMEX**  
 GROUP  
[www.almex.com](http://www.almex.com) 1.800.977.5423