

TSE

TREAD SPLICER

The Almex TSE Tread Splicer is built and sized to vulcanize tire treads seamlessly in a 20 minute cure. A tread molds can be installed on the lower platen mounting plates quickly and easily.

FEATURES:

- Almex pressure bag and platens
- T locking handle
- 100 psi (7kg/cm²) maximum pressure



SPECIFICATIONS:

TSE-1018-100

- 1011 mm x 333.4 mm x 606.6 mm (39 13/16" x 13 1/8" x 23 7/8")
- 457.2 mm (18") x 311.2 mm (12 1/4") platen
- 76.5 mm (3") daylight opening

TSE-1218-100

- 931.62 mm x 282.58 mm x 597.72 mm (36 11/16" x 11 1/8" x 23 17/32")
- 457.2 mm (18") x 260.35 mm (10 1/4") platen
- 76.5 mm (3") daylight opening

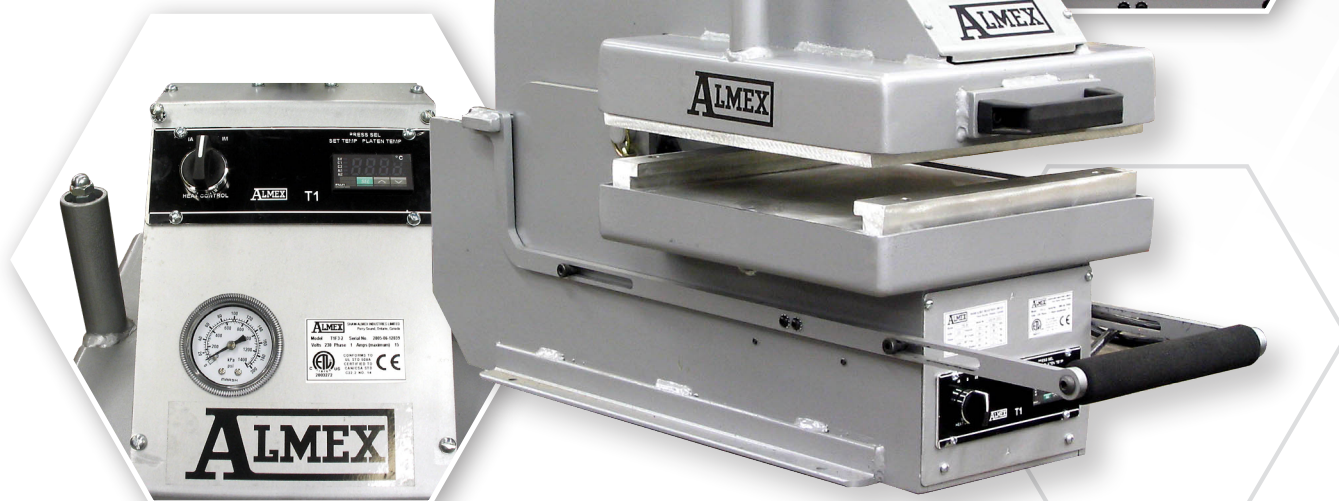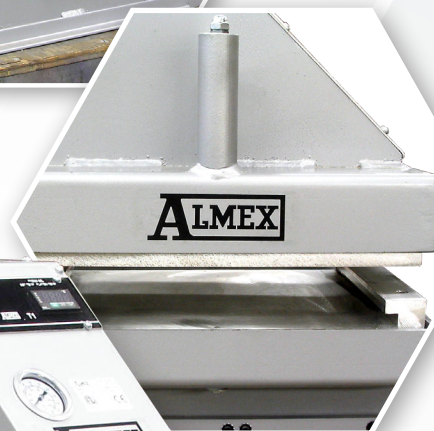

GL

Shaw Almex
Mining Equip. (Tianjin) Co. Ltd.
☎ +86 (22) 2388-9075

PT. Shaw Almex
Indonesia
☎ +61 488 780243

Shaw Almex
Pacific Pty Ltd. Qld
☎ 61 7 4774 2011

Shaw Almex
Pacific Pty Ltd. WA
☎ 61 8 9358 5860

Shaw Almex
India PVT. Ltd.
☎ 91-129-2274624

 **ALMEX**
GROUP
www.almex.com 1.800.977.5423