


For permanent monitoring, Almex Global Services staff can permanently mount the equipment and remotely monitor the conveyor belt anywhere in the world through our Remote Monitoring Centre's.

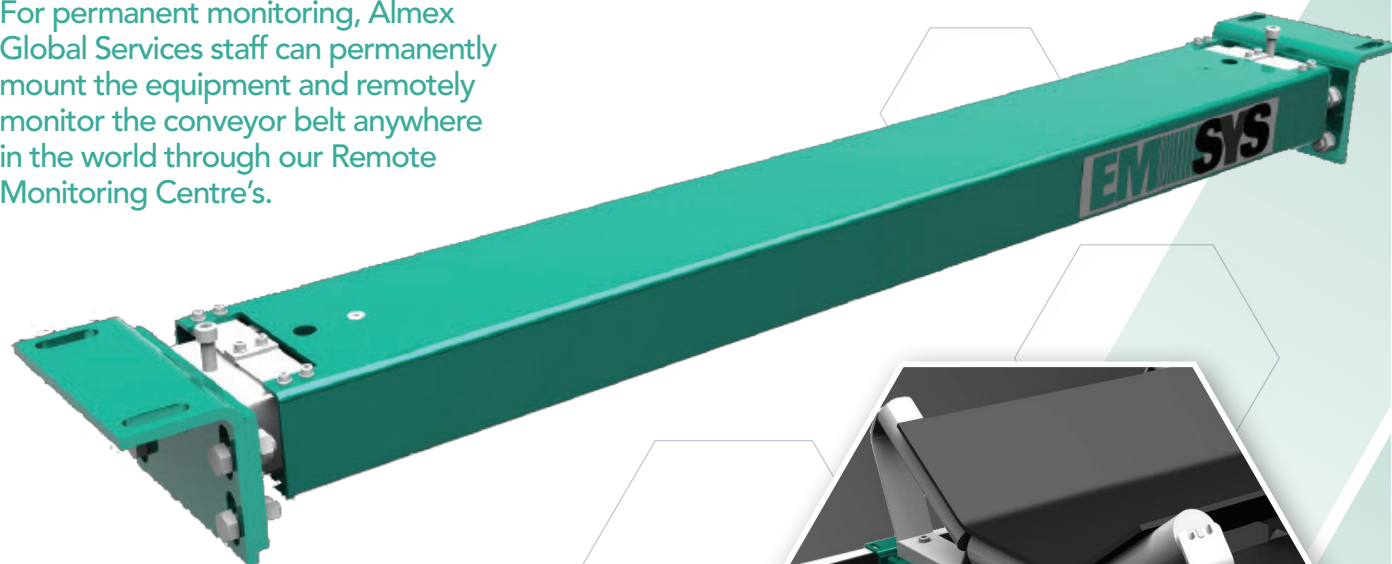

SB-BW

BELT SCALE

The **EMSYS SB-BW Belt Scale** is a compact and robust system to determine the flow rate, calculate the total amount of material as well as provide load profiles for the conveyor. The **EMSYS Belt Scale** is designed to withstand harsh weather and outdoor conditions. The simple but rugged design, quick and easy installation, and requiring limited maintenance makes the SB-BW the ideal option for weighing material.



FEATURES:

- Weighing beam is integrated into an idler set
- conveyed material applies a force proportional to weight on the roller and is read by the load cells
- Simultaneous belt speed readings with weight
- Weight and speed recordings provide the flow rate

SPECIFICATIONS:

Belt width: Standard 1000 mm - 2500 mm

Belt speed: 0.5 m/s - 5 m/s

Inclination: $\leq 20^\circ$ from the horizontal at fixed incline
(no relative material movement) $\geq 20^\circ$ by reduced accuracy

Profile of roller bracket: $40^\circ < 45^\circ$ by reduced accuracy

Spacing from neighbored: 0.6 m – 1.5 m

Roller brackets IP-Code: IP 65

Accuracy*: $\pm 0.5\%$ of actual flow rate
 $\pm 1\%$ of maximum flow rate

Design: Standard and ATEX [Ex I M2 EEx ib I]

*XSpecified accuracies refer either to Maximum Flow Rate or to the corresponding Actual Flow Rate (Range: +25% to -100 %)

NA

Shaw Almex
Europe B.V.
☎ 31 646648648

Shaw Almex
Industries, Canada
☎ 1 905 643 7750

Shaw Almex
Industries, Canada
☎ 1 705 746 5884

Shaw Almex
Fusion, LLC. U.S.A.
☎ 1 404 292 8600

Shaw Almex
Africa (Pty) Ltd.
☎ 27 11 794 8262

 **ALMEX**
GROUP
www.almex.com 1.800.977.5423