


MODEL – MVP

5 inch (125 mm) Platen
and
8 inch (200 mm) Platen

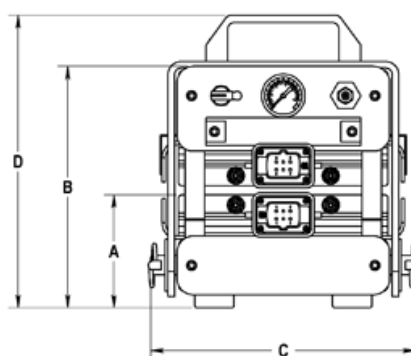

Maximum operating pressure
40 psi (2.8 kg/cm²)

Maximum temperature
392 deg F (200 deg C)

MODEL	PLATEN SIZE		MAXIMUM BELT WIDTH		DIMENSION "A"		DIMENSION "B"		DIMENSION "C"		DIMENSION "D"		OVERALL LENGTH		TOTAL WEIGHT		POWER (KW) TOTAL
	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	LBS	KG	

MVP 5 inch (125 mm) Platen 40 psi (2.8 kg/cm²)

MVP-514-R-40	5 x 14	125 x 355	12	300	4	100	9.1	230	6.5	165	11	280	27.3	695	34	15	0.9
MVP-518-R-40	5 x 18	125 x 455	16	400	4	100	9.1	230	6.5	165	11	280	29.3	745	37	17	1
MVP-526-R-40	5 x 26	125 x 660	24	600	4	100	9.1	230	6.8	175	11	280	39.8	1010	52	24	1.3
MVP-532-R-40	5 x 32	125 x 810	30	750	4	100	9.1	230	6.8	175	11	280	43.8	1115	63	32	1.6
MVP-536-R-40	5 x 36	125 x 915	34	850	4.8	120	10.5	265	8.3	210	13	330	50	1270	93	42	1.9
MVP-542-R-40	5 x 42	125 x 1065	40	1000	4.8	120	10.5	265	8.3	210	13	330	56	1420	110	50	2.2
MVP-546-R-40	5 x 46	125 x 1165	42	1065	4.8	120	10.5	265	8.3	210	13	330	60	1525	120	55	2.3
MVP-552-R-40	5 x 52	125 x 1320	50	1250	4.8	120	10.5	265	8.3	210	13	330	63.8	1620	124	56	2.8
MVP-564-R-40	5 x 64	125 x 1625	60	1500	5.6	140	13	330	8.3	210	14.8	375	76	1930	165	75	3.3
MVP-578-R-40	5 x 78	125 x 1980	74	1880	6.3	160	14.8	375	8.3	210	15.3	390	90	2285	219	100	4.3
MVP-586-R-40	5 x 86	125 x 2185	82	2100	7.3	185	16.8	425	9	230	17.8	450	98.8	2510	280	127	4.3
MVP-596-R-40	5 x 96	125 x 2440	92	2350	7.6	193	17.9	455	9	230	18.8	478	108.9	2765	298	135	4.3


MVP 8 inch (200 mm) Platen 40 psi (2.8 kg/cm²)

MVP-814-R-40	8 x 14	200 x 355	12	300	4	100	9	230	9.6	245	11	280	29.5	750	57	26	1.3
MVP-818-R-40	8 x 18	200 x 455	16	400	4	100	9	230	9.6	245	11	280	33.5	850	66	30	1.6
MVP-826-R-40	8 x 26	200 x 660	24	600	4	100	9	230	9.6	245	11	280	41.5	1055	85	39	2.2
MVP-832-R-40	8 x 32	200 x 810	30	750	4	100	9	230	9.6	245	11	280	47.5	1205	100	45	2.9
MVP-838-R-40	8 x 38	200 x 965	36	900	6	150	13	330	10	455	14.8	375	53	1350	172	78	3.0
MVP-842-R-40	8 x 42	200 x 1065	40	1000	6	150	13	330	10	255	14.8	375	57	1450	180	82	3.2
MVP-846-R-40	8 x 46	200 x 1165	44	1100	6	150	13	330	10	255	14.8	375	61	1550	185	84	3.8
MVP-852-R-40	8 x 52	200 x 1320	50	1250	6	150	13	330	10	255	14.8	375	67	1700	207	94	3.9
MVP-864-R-40	8 x 64	200 x 1625	60	1500	6	150	13	330	10	255	14.8	375	79	2005	245	111	5.1
MVP-869-R-40	8 x 69	200 x 1750	65	1650	7.5	190	16.8	425	12	305	19.8	505	83.5	2120	336	152	5.5
MVP-878-R-40	8 x 78	200 x 1980	74	1900	7.5	190	16.8	425	12	305	19.8	505	92.5	2350	370	168	6.2
MVP-886-R-40	8 x 86	200 x 2185	82	2100	7.5	190	16.8	425	12	305	19.8	505	100.5	2555	385	175	7.5
MVP-896-R-40	8 x 96	200 x 2440	92	2350	9.5	240	20.8	530	12	305	23.8	605	110.5	2805	525	239	7.7
MVP-8106-R-40	8 x 106	200 x 2690	102	2600	9.5	240	20.8	530	12	305	23.8	605	120.5	3060	670	305	8
MVP-8124-R-40	8 x 124	200 x 3150	120	3050	9.8	250	21	535	12	305	26	660	140	3555	847	385	10
MVP-8138-R-40	8 x 138	200 x 3500	134	3400	12.9	325	27.9	710	14.9	380	31.2	800	152.9	3885	1090	494	11
MVP-8142-R-40	8 x 142	200 x 3605	138	3500	12.9	325	27.9	710	14.9	380	31.2	800	156.9	3985	1120	508	11.3

Specifications are approximate and subject to change without notice.

MODEL – VULCAWELD

8 inch (200 mm) Platen

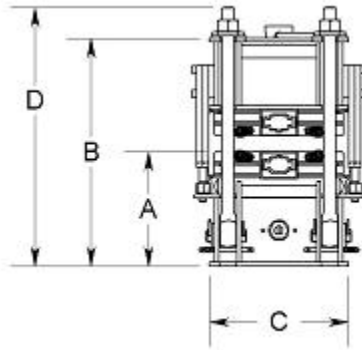

Maximum operating pressure
75 psi (5 kg/cm²)

Maximum temperature
392 deg F (200 deg C)

MODEL	PLATEN SIZE		MAXIMUM BELT WIDTH		DIMENSION "A"		DIMENSION "B"		DIMENSION "C"		DIMENSION "D"		OVERALL LENGTH		TOTAL WEIGHT		POWER (KW) TOTAL
	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	LBS	KG	
VWP-814-R-75	8 x 14	200 x 355	12	300	5.38	135	11.5	290	10.8	275	12.5	320	20.8	530	56	25	1.1
VWP-818-R-75	8 x 18	200 x 455	16	400	5.5	140	11.8	300	10.8	275	12.5	320	24.8	630	85	39	1.4
VWP-826-R-75	8 x 26	200 x 660	24	600	5.63	145	11.8	300	10.8	275	12.5	320	32.8	835	91	41	2.1
VWP-832-R-75	8 x 32	200 x 810	30	750	6.38	160	12.8	325	10.8	275	13.5	345	39	990	114	52	2.6
VWP-842-R-75	8 x 42	200 x 1065	40	1000	6.63	170	14.1	360	10.8	275	15.5	395	49	1245	162	73	3.4
VWP-852-R-75	8 x 52	200 x 1320	50	1250	8.25	210	16.6	420	10.8	275	18.3	465	60.7	1540	216	98	4.2
VWP-864-R-75	8 x 64	200 x 1625	60	1500	9.88	250	19.9	505	10.8	275	21.8	555	72.7	1845	288	131	5.1
VWP-878-R-75	8 x 78	200 x 1980	74	1900	10.88	275	22.1	560	10.8	275	25.5	650	86.9	2205	372	169	6.2
VWP-886-R-75	8 x 86	200 x 2185	82	2100	11.68	295	23	585	11	280	26	660	104.4	2650	473	215	7.5
VWP-896-R-75	8 x 96	200 x 2440	92	2350	12.5	320	23.6	600	11	280	28	710	104.7	2660	543	246	7.7
VWP-8124-R-75	8 x 124	200 x 3150	120	3050	13.25	335	25.6	650	11	280	28.8	730	134.5	3415	1037	470	9.9

MODEL – CANTILEVER VULCAWELD

8 inch (200 mm) Platen

Maximum operating pressure 75 psi (5 kg/cm²)
Maximum temperature 392 deg F (200 deg C)

MODEL	PLATEN SIZE		MAXIMUM BELT WIDTH		OVERALL LENGTH		OVERALL WIDTH		TOTAL WEIGHT		POWER (KW) TOTAL
	INCH	MM	INCH	MM	INCH	MM	INCH	MM	LBS	KG	
VCF-842-R-75	8 x 42	200 x 1065	40	1000	71.5	1815	42	1065	550	249	3.4
VCF-852-R-75	8 x 52	200 x 1320	50	1250	73.6	1870	52	1320	640	290	4.2
VCF-864-R-75	8 x 64	200 x 1625	60	1500	90	2285	52	1320	850	385	5.1
VCF-878-R-75	8 x 78	200 x 1980	74	1900	100	2540	64	1625	1040	472	6.2
VCF-886-R-75	8 x 86	200 x 2185	82	2100	113.5	2885	60	1525	1120	508	6.9
VCF-896-R-75	8 x 96	200 x 2440	92	2350	128	3250	60	1525	1200	544	7.7
VCF-8124-R-75	8 x 124	200 x 3150	120	3050	158.6	4030	64	1625	1600	726	9.9

Specifications are approximate and subject to change without notice.