


MODEL SP SPOT REPAIR

12 inch (300 mm) Platen




Maximum operating pressure
100 psi (7 kg/cm²)

Maximum temperature
325 deg F (163 deg C)

MODEL	PLATEN SIZE		MAXIMUM BELT WIDTH		'EA' BAR LENGTH		'EA' BAR WEIGHT		COMPONENT WEIGHTS								POWER
									'EA' BOLT/NUT ASSEMBLY WEIGHT		UPPER PLATEN ASSEMBLY		LOWER PLATEN ASSEMBLY		TOTAL WEIGHT		
	IN	MM	IN	MM	IN	MM	LBS	KG	LBS	KG	LBS	KG	LBS	KG	LBS	KG	
SP-1212-42-R-100	12 x 12	300 x 300	42	1000	51	1295	63	29	18	8	34	15	50	23	260	118	0.9
SP-1212-48-R-100	12 x 12	300 x 300	48	1200	57	1445	71	32	18	8	34	15	50	23	275	125	0.9
SP-1212-72-R-100	12 x 12	300 x 300	72	1800	81	2055	100	46	18	8	34	15	50	23	335	152	0.9
SP-1212-84-R-100	12 x 12	300 x 300	84	2100	93	2360	115	52	18	8	34	15	50	23	365	165	0.9

MODEL SP SPOT REPAIR

20 inch (500 mm) Platen

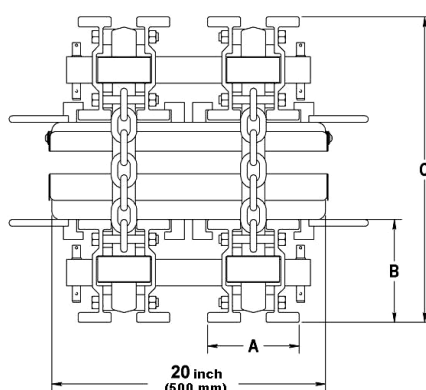

Maximum operating pressure
100 psi (7 kg/cm²) or 200 psi (14 kg/cm²)
Maximum temperature 325 deg F (163 deg C)

	MODEL SP 100 PSI max		MODEL SP 200 PSI max	
TRAVERSE BAR WITH BOLT/NUT ASSEMBLY	TYPE EA		TYPE EAX	
	in	mm	in	mm
Dim A	7	175	7	175
Dim B	7.75	195	10	265
Dim C	22	570	27.5	700

MODEL	PLATEN SIZE		MAXIMUM BELT WIDTH		BAR LENGTH		BAR WEIGHT		COMPONENT WEIGHTS								POWER
									BOLT/NUT ASSEMBLY WEIGHT		UPPER PLATEN ASSEMBLY		LOWER PLATEN ASSEMBLY		TOTAL WEIGHT		
	IN	MM	IN	MM	IN	MM	LBS	KG	LBS	KG	LBS	KG	LBS	KG	LBS	KG	KW
Maximum operating pressure 100 PSI (7 kg/cm sq)																	
SP-2020-48-R-100	20 x 20	500 x 500	48	1200	57	1445	71	32	18	8	83	38	105	48	575	260	2.6
SP-2020-60-R-100	20 x 20	500 x 500	60	1500	69	1750	86	39	18	8	83	38	105	48	635	285	2.6
SP-2020-72-R-100	20 x 20	500 x 500	72	1800	81	2055	100	45	18	8	83	38	105	48	690	313	2.6
SP-2020-84-R-100	20 x 20	500 x 500	84	2100	93	2360	115	52	18	8	83	38	105	48	750	340	2.6
SP-2020-96-R-100	20 x 20	500 x 500	96	2400	105	2665	130	59	18	8	83	38	105	48	810	365	2.6
Maximum operating pressure 200 PSI (14 kg/cm sq)																	
SP-2020-72-R-200	20 x 20	500 x 500	72	1800	81	2055	123	56	20	9	83	38	110	50	795	360	2.6
SP-2020-84-R-200	20 x 20	500 x 500	84	2100	93	2360	141	64	20	9	83	38	110	50	865	390	2.6
SP-2020-96-R-200	20 x 20	500 x 500	96	2400	105	2665	160	73	20	9	83	38	110	50	945	430	2.6

Specifications are approximate and subject to change without notice.