
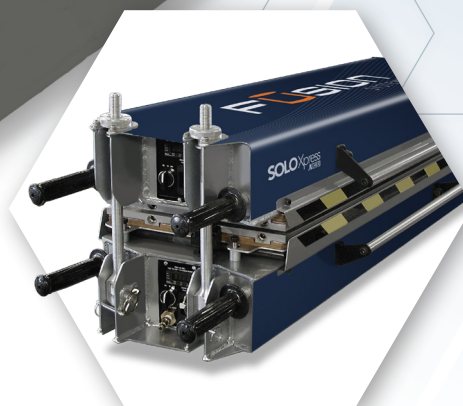


SOLO XPRESS

The Almex SOLO Xpress press is the lightest rubber vulcanizer in the industry. This dependable, portable frame press is designed for a single user and uses little power. With an ergonomic and efficient design, the two-piece SOLO Xpress requires little time for assembly and disassembly. It can be carried to the splice location with ease.

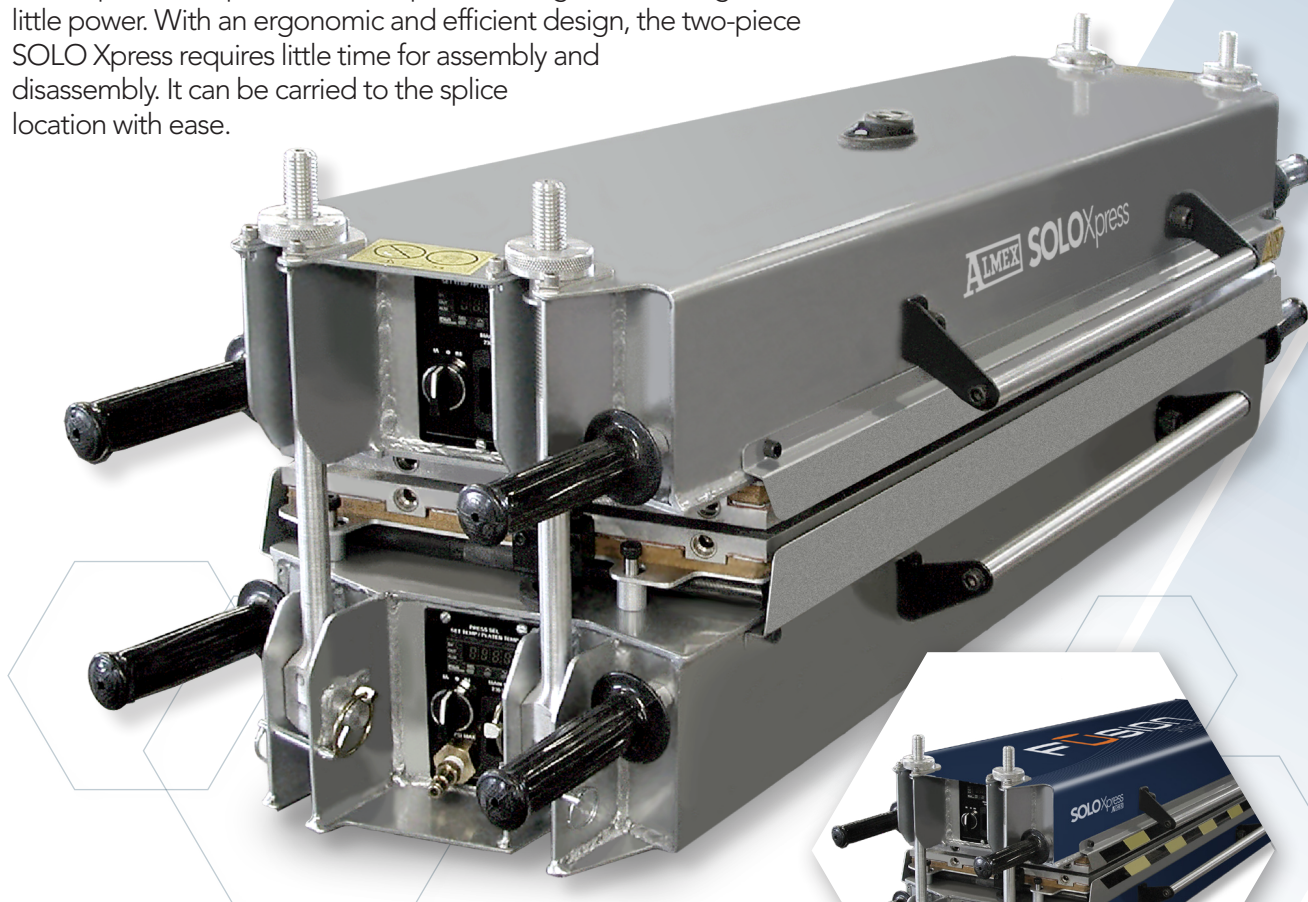

(▲ SOLOXpress shown with custom wrap applied)

FEATURES:

- Signature Almex Pressure Bag construction for uniform pressure
- Custom Extruded Plank cooling system within platens
- Innovative Silicone Element fast heating system
- Upper and lower rugged aluminum frames
- T-Series control panel in frame or external for managing temperature
- Side and end handles make transportation easy
- All electric control panels used with SOLO Xpress are CE, CSA and UL approved
- SOLO Xpress platens are a rhombic configuration
- SOLO Xpress presses can be aligned side-by-side for longer splices
- Each SOLO Xpress is custom built-to-order

SA



COMPONENT	DESCRIPTION
PLATENS	- Utilizes innovative Almex flexible platen constructed from extruded plank, silicone heating element and durable composite insulation - Each platen contours to belt irregularities, ensuring uniform results. Maximum temperature 163 °C (325 °F) - Rhombic platens
FRAME	- Two light and rugged aluminum frames comprise upper and lower portions of press - Ends equipped with carrying handles on smaller models; sides are also equipped with handles on larger models.
CONTROL PANEL	Suitable Controls: - T1F: Inframe, maximum 30 amps total - T2: Remote, maximum 40 amps total for 230 Volt single phase operation - T6: Remote, maximum 30 amps total for three phase operation - T2 and T6 panels feature dual temperature control and indication systems - Optional timer available on T2 and T6 models.
PRESSURE/COOLING	- Almex inflatable pressure system, made from durable fabric-reinforced rubber ensures uniform pressure across splice surface - Presses available for 100 PSI maximum - Quick integral water cooling incorporated in platen design

SA

Almex Fusion de Mexico
☎ 01 (477) 962 97 43

Almex Peru S.A.C.
☎ 51 999 894040

Shaw Almex Chile SpA
☎ +56 2 2 745 3969

Almex Indústria do Brasil Limitada
☎ +51 31 3120 3737