

# **BREAKER FABRIC**

## **OFF BALANCE**

Breaker Fabric is available in skimmed, off balance and 200 Lbs. Steel Cord belt models.

Almex Off Balance Breaker Fabric is a Leno Weave RFL treated fabric skimmed with uncured rubber for hot vulcanized belt splicing reinforcement. It is designed for fast build up of finger splices and step splicing of standard grade fabric belts. Features one layer of .040 tie gum already applied (Red Poly side).

### **FEATURES:**

- Enhances working life of belt splices with better flexibility and strength
- Improves the time needed to build up and wrap the fingers
- Eliminates surface contamination (normal application) with double sided poly.
- Uses poly color coding system to ID compound.
- Almex Off Balance Breaker Fabric poly is Blue / Red (.010 gauge rubber Blue side / .040 gauge rubber on Red side).

### **USES:**

For Natural Rubber (NR), Polyisoprene (IR), Styrene-Butadiene (SBR), Polybutadiene (BR), Polychloroprene i.e. - Neoprene (CR) rubber belt splices.

#### Product Information


**Properties:** 

Rubber Colour: Black Poly Colour: Blue/Red Base Polymer: SBR Rubber Specific Gravity: 1.15 - 1.21 Hardness: 60 - 68 Shore A Rubber Tensile: 2000 - 2600 psi

Rubber Elongation: 300 - 500 % (at break) Shelf Life: 6 Months at 21°C (70°F) or

12 Months at 10 °C (50 °F).

Fabric Type: Leno Weave Nylon (Warp & Weft) Fabric Weight: 9.0 - 10oz per square yard

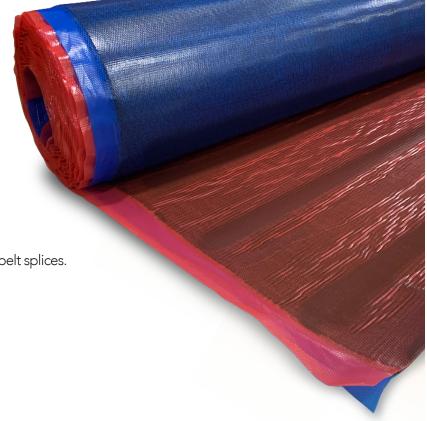

PRODUCT CODE	DESCRIPTION	DIMENSIONS - METRIC (TxWxL)	DIMENSIONS - IMPERIAL (TxWxL)	POLY COLOUR
AA-OBFS-090	Off Balance Finger Splice	2.29 mm x 990.6 mm x 10058.4 mm	0.090" x 39" x 33'	Blue/Red
AA-OBFS-090-54	Off Balance Finger Splice	2.29 mm x 1371.6 mm x 10058.4 mm	0.090" x 54" x 33'	Blue/Red
AA-OBFS-090-63	Off Balance Finger Splice	2.29 mm x 1600.2 mm x 10058.4 mm	0.090" x 63" x 33'	Blue/Red
AA-200BFS-063-82	200 lb Steel Cord Splice	1.60 mm x 2082.80 mm x 9144.0 mm	0.063" x 82" x 30'	White

SA

Almex Fusion de Mexico • 01 (477) 962 97 43 Almex Peru S.A.C. 51 999 894040

Shaw Almex Chile SpA +56 2 2 745 3969

Almex Indústria do Brasil Limitada 4 +51 31 3120 3737

