


# FUSIONLAGG OMD

## ORANGE MINI DIAMOND

**FusionLagg OMD** (Orange Mini Diamond) is a small-profile pulley lagging, ideal for drive pulleys with medium to low tension and belt ratings.

### FEATURES:

- Excellent co-efficient of friction in wet or muddy installations
- Featuring our **Fusion Systems proprietary bonding layer technology** significantly enhancing the bond between the lagging and the pulley shell
- Features the Fusion bonding layer technology for superior adhesion to the pulley surface
- A natural rubber compound with high abrasion-resistance and water-shedding capability
- The molded mini-diamond pattern offers exceptional grip and wear resistance
- Ideal for drive, head, or tail pulleys requiring a medium profile and particularly suited for wet applications

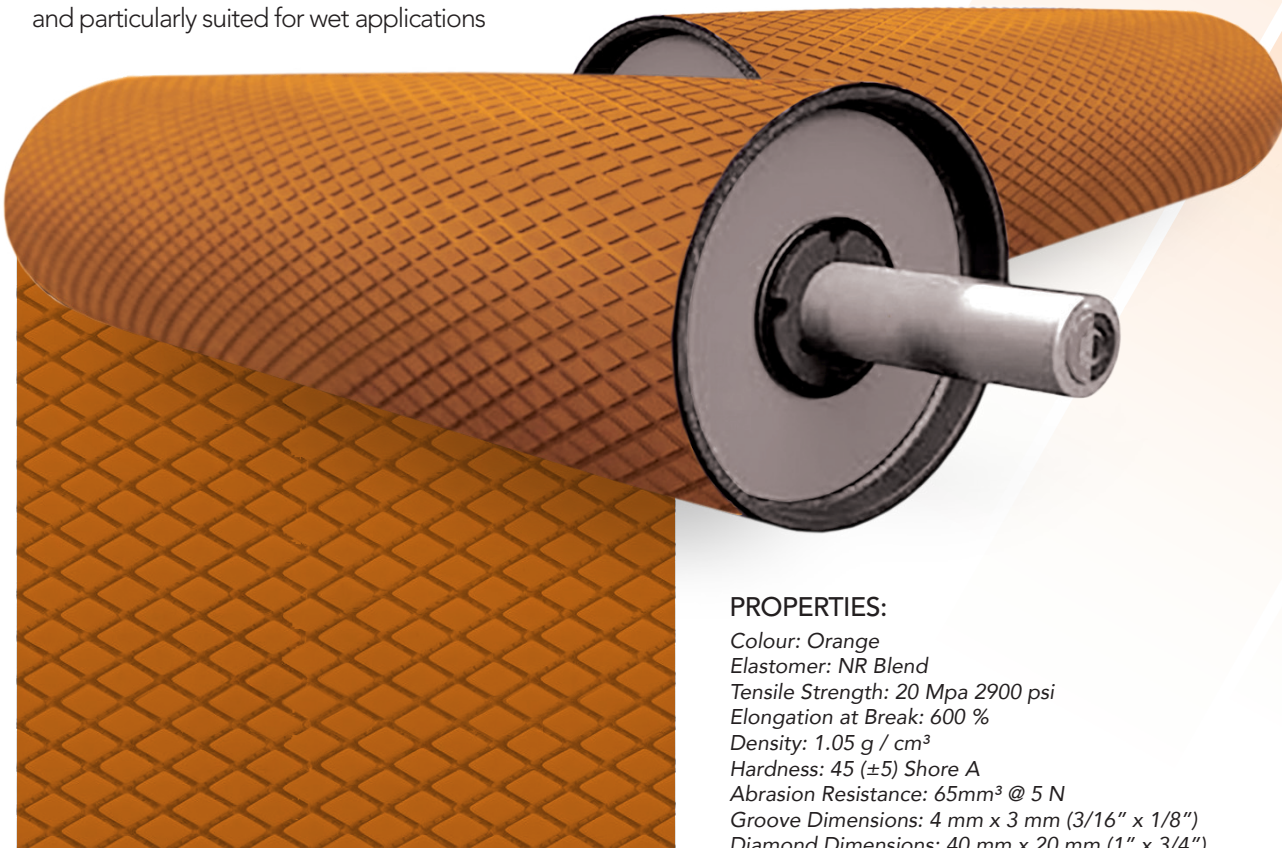

### PROPERTIES:

Colour: Orange  
 Elastomer: NR Blend  
 Tensile Strength: 20 Mpa 2900 psi  
 Elongation at Break: 600 %  
 Density: 1.05 g / cm<sup>3</sup>  
 Hardness: 45 (±5) Shore A  
 Abrasion Resistance: 65mm<sup>3</sup> @ 5 N  
 Groove Dimensions: 4 mm x 3 mm (3/16" x 1/8")  
 Diamond Dimensions: 40 mm x 20 mm (1" x 3/4")

PRODUCT CODE

DIMENSIONS - METRIC (TxWxL)

DIMENSIONS - IMPERIAL (TxWxL)

CFL-OMD-650

8 mm x 1500 mm x 15.25 M

5/16" x 59.5" x 50'

**SPECIAL  
ORDER**

SPECIAL ORDER ITEMS  
MAY EXPERIENCE DELAYED  
DELIVERY TIME.

NA

Shaw Almex  
Europe B.V.  
☎ 31 646648648

Shaw Almex  
Industries, Canada  
☎ 1 905 643 7750

Shaw Almex  
Industries, Canada  
☎ 1 705 746 5884

Shaw Almex  
Fusion, LLC. U.S.A.  
☎ 1 404 292 8600

Shaw Almex  
Africa (Pty) Ltd.  
☎ 27 11 794 8262

**ALMEX**  
GROUP  
www.almex.com 1.800.977.5423