

# FINGER PUNCH

The Almex Lightweight Finger Punch punches both ends of the belt at the same time, eliminating waste. This fully automatic and pneumatic machine makes finger punching quick and easy. It is suitable for prepping finger and finger-over-finger splices for PVC and polyurethane belts up to 8 mm (0.315") thick and 3 M (118") wide.

## FEATURES:

- Sturdy subframe
- Automated 230.2 mm (8") cylinder, steel punching head for straight and angled configurations
- Punching board
- High-speed steel blades
- Two pneumatic cylinder clamps to hold belt in place
- Control panel
- Up to 100 psi air supply
- Unattended operation during punching operation
- Castors for ultimate portability

## OPTIONS:

- Castors


## PROPERTIES:

### 2M Finger Punch

- Width: 2.5 M (98.4")
- Length: 1 M (39.3")
- Voltage: 220 1 PH
- Weight: 400 kg (882 Lbs.)
- Max Width: 2 M (79")
- Speed: 800 mm/minute (31.5"/min.)
- Max thickness: 8 mm (0.315")

### 3M Finger Punch

- Width: 3.5 M (138")
- Length: 1 M (39.3")
- Voltage: 220 1 PH
- Weight: 750 kg (1654 Lbs.)
- Max Width: 2 M (79")
- Speed: 800 mm/minute (31.5"/min.)
- Max thickness: 8 mm (0.315")

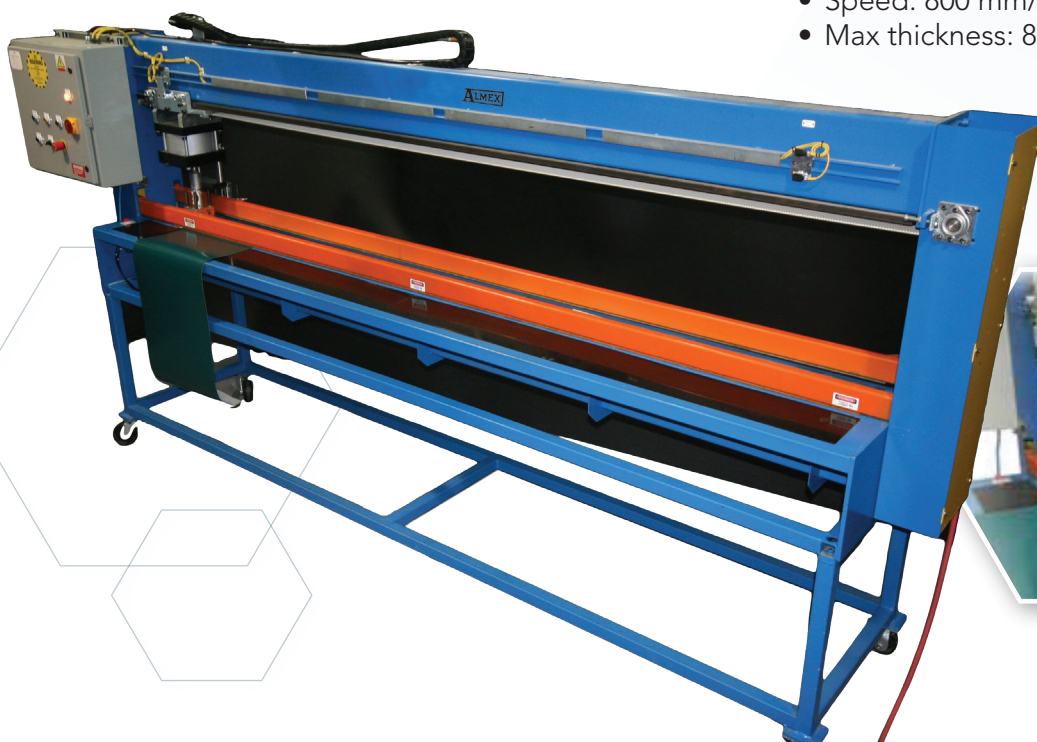

NA

Shaw Almex  
Europe B.V.  
☎ 31 646648648

Shaw Almex  
Industries, Canada  
☎ 1 905 643 7750

Shaw Almex  
Industries, Canada  
☎ 1 705 746 5884

Shaw Almex  
Fusion, LLC. U.S.A.  
☎ 1 404 292 8600

Shaw Almex  
Africa (Pty) Ltd.  
☎ 27 11 794 8262

**ALMEX**  
GROUP  
www.almex.com 1.800.977.5423